

EKSPLOATĀCIJAS ĪPAŠĪBU DEKLARĀCIJA No. CPR-IT1/0480

- Unikāls izstrādājuma tipa identifikācijas numurs: **MAPESIL AC Jaunie krāsu toņi**
(Toņi nr. 103, 115, 116, 119, 133, 134, 135, 136, 137, 138, 149, 152, 174, 299)
- Paredzētais pielietojums: **Silikona bāzes hermētiķis nestrukturālajiem darbiem iekštelpās un ārpus tām, fasāžu elementiem un stiklam, arī aukstos klimatiskajos apstākļos, kā arī sanitārajiem mezgliem.**
- Ražotājs: **MAPEI S.p.A. – Via Cafiero, 22 – 20158 Milan – Italy - www.mapei.it**
- Sistēma AVCP: **Sistēma 3**
- Vienotais standarts: **EN 15651-1:2012, EN 15651-2:2012, EN 15651-3:2012**
Izpildinstitūcijas: **Laboratorija IFT Rosenheim GmbH, un. 0757, veikusi novērtējumu, pamatojoties uz testa paraugiem, ko iesniedzis ražotājs.**
- Deklarētās ekspluatācijas īpašības:

EN 15651-1:2012 F-EXT-INT-CC (CLASS 25LM)
Apstākļi: Metode A:
Pamatne: Stikls, kas gruntēts ar CLEAN PRIMER 1226

Būtiskākie raksturlielumi	Ekspluatācijas īpašības
Ugunsdrošība: Kaitīgu vielu izdalīšanās – Temperatūras izturība: – Apjoma zudums – Stiepes īpašības pie pastāvīga pagarinājuma, pēc iegremdēšanas ūdenī – Sekantes stiepes modulis pie -30 °C – Stiepes īpašības pie pastāvīga pagarinājuma pie -30 °C – Ilgmūžība	Klase E Skat DDL ≤ 3 mm ≤ 10 % Atbilst ≤ 0,9 MPa Atbilst Atbilst

EN 15651-2:2012 G-CC (CLASS 20LM)
Apstākļi: Metode:
Pamatne: Stikls, kas gruntēts ar CLEAN PRIMER 1226

Būtiskākie raksturlielumi	Ekspluatācijas īpašības
Ugunsdrošība: Kaitīgu vielu izdalīšanās – Temperatūras izturība: – Apjoma zudums – Adhēzijas un kohēzijas īpašības pēc iedarbības mākslīgā apgaismojumā – Elastības atjaunošanās – Sekantes stiepes modulis pie -30 °C – Stiepes īpašības pie pastāvīga pagarinājuma pie -30 °C – Ilgmūžība	Klase E Skat DDL ≤ 3 mm ≤ 10 % Atbilst ≥ 60 % ≤ 0,9 MPa Atbilst Atbilst

EN 15651-3:2012

KLASE XS 1

Apstākļi:

Metode A:

Pamatne:

Stikls, kas gruntēts ar CLEAN PRIMER 1226

Būtiskākie raksturlielumi	Ekspluatācijas
Ugunsdrošība:	Klase E
Kaitīgu vielu izdalīšanās	Skat DDL
– Temperatūras izturība:	
– Apjoma zudums	≤ 3 mm
– Stiepes īpašības pie patstāvīga pagarinājuma, pēc iegremdēšanas ūdenī	≤ 10 %
– Mikroorganismu dzīvotspēja	Atbilst
– Ilgmūžība	0
	Atbilst

7) informācija par REACH: informācija, kas minēta 31. pantā vai, attiecīgi, 33. pantā Regulā (EK) Nr. 1907/2006 un sekojoši grozījumi ir norādīti drošības datu lapā, kuru MAPEI dara pieejamu tīmekļa vietnē kopā ar pašreizējo darbības deklarāciju

Augstāk norādītā produkta veiktspēja atbilst deklarētajām īpašībām.

Šī ekspluatācijas īpašību deklarācija ir izsniegta saskaņā ar Regulu (ES) Nr 305/2011, ar pilnu iepriekš norādītā ražotāja atbildību

Parakstīts ražotāja vārdā: **Lorenzo Martino** – **Korporatīvā Kvalitātes Vadība**

Milāna, 17/07/2019


.....

EĪD PDF formātā ir pieejamas Mapei mājas lapā

CE marking

CE 0757	MAPEI Via Cafiero, 22 - 20158 MILANO – ITALY www.mapei.it		
14 CPR-IT1/0480 EN 15651-1 F-EXT-INT-CC EN 15651-2 G-CC EN 15651-3 XS 1 MAPESIL AC (New colors) Silicone sealant for non–structural internal and external use in façade elements and glazing applications, also in cold climates, and in sanitary areas			
Conditioning: method A Substrate: Glass with CLEANPRIMER 1226			
	EN 15651-1	EN 15651-2	EN 15651-3
Reaction to fire Release of dangerous substances	Class E See SDS		
Water tightness and air tightness: – Resistance to flow – Loss of volume – Tensile properties at maintained extension after immersion in water – Secant tensile modulus at -30°C – Tensile properties at maintained extension -30°C – Adhesion and cohesion properties after exposure to heat, water and artificial light – Elastic recovery Microbiological growth Durability	≤ 3 mm ≤ 10 % Pass ≤ 0,9 MPa Pass == == == Pass	≤ 3 mm ≤ 10 % == ≤ 0,9 MPa Pass Pass ≥ 60% == Pass	≤ 3 mm ≤ 10 % Pass == == == == 0 Pass

CE reminder printed on the cartridge

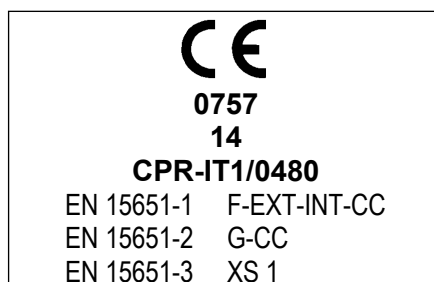

Note:

MAPEI supplies the current annex along with the DoP to make the consultancy of the CE marking easier for the international clients. The enclosed CE marking can be slightly different compared to the one printed on the relevant packaging or documentation because of:

- graphic adaptations due to lack of space on the packaging or printing methods used,
- different language (the same packaging can be shared by several countries),
- the product is already in stock when the updating of the CE marking is implemented,
- printing mistakes.

DECLARATION OF PERFORMANCE N. CPR-IT1/0480

- 1) Unique identification code of the product-type: **MAPESIL AC New colors**
(Colors N. 103, 115, 116, 119, 133, 134, 135, 136, 137, 138, 139, 149, 152, 174, 299)
- 2) Intended uses: **silicone sealant for non-structural internal and external use in façade elements and glazing application, also in cold climates, and in sanitary areas**
- 3) Manufacturer: **MAPEI S.p.A. – Via Cafiero, 22 – 20158 Milan – Italy - www.mapei.it**
- 4) Systems of AVCP: **System 3**
- 5) Harmonized standards: **EN 15651-1:2012, EN 15651-2:2012, EN 15651-3:2012**

Notified bodies: **The notified laboratory ift Rosenheim GmbH, N.° 0757, carried out the assessment of the performance on the basis of testing on samples taken by the manufacturer**

- 6) Performances declared:

EN 15651-1 F-EXT-INT-CC (CLASS 25LM)
Conditioning: Method A
Substrate: Glass with primer CLEANPRIMER 1226

Essential characteristics	Performances
Reaction to fire	Class E
Release of dangerous substances	See SDS
Water tightness and air tightness:	
– Resistance to flow	≤ 3 mm
– Loss of volume	≤ 10 %
– Tensile properties at maintained extension after immersion in water	Pass
– Secant tensile modulus at -30°C	≤ 0,9 MPa
– Tensile properties at maintained extension at -30°C	Pass
Durability	Pass

EN 15651-2 G-CC (CLASS 20LM)
Conditioning: Method A
Substrate: Glass with primer CLEANPRIMER 1226

Essential characteristics	Performances
Reaction to fire	Class E
Release of dangerous substances	See SDS
Water tightness and air tightness:	
– Resistance to flow	≤ 3 mm
– Loss of volume	≤ 10 %
– Adhesion and cohesion properties after exposure to artificial light	Pass
– Elastic recovery	≥ 60 %
– Secant tensile modulus at -30°C	≤ 0,9 MPa
– Tensile properties at maintained extension at -30°C	Pass

Durability

Pass

EN 15651-3

CLASS XS 1

Conditioning:

Method A

Substrate:

Glass with primer CLEANPRIMER 1226

Essential characteristics	Performances
Reaction to fire	Class E
Release of dangerous substances	See SDS
Water tightness and air tightness:	
– Resistance to flow	≤ 3 mm
– Loss of volume	≤ 10 %
– Tensile properties at maintained extension after immersion in water	Pass
– Microbiological growth	0
Durability	Pass

- 7) REACH information: the information referred to Article 31 or, as appropriate, to Article 33 of the REACH Regulation (EC) no. 1907/2006 and following amendments are indicated in the safety data sheet that MAPEI makes available on the website along with this current Declaration of Performance

The performance of the product identified above is in conformity with the set of declared performances.

This declaration of performance is issued, in accordance with Regulation (EU) No 305/2011, under the sole responsibility of the manufacturer identified above.

Signed for and on behalf of the manufacturer by: **Lorenzo Martino – Corporate Quality Management**

Milan, 17/07/2019




DoP in Pdf format are available in the Mapei website.

Revision 3 notes: New color 299 + point 7

CE marking

CE 0757	MAPEI Via Cafiero, 22 - 20158 MILANO – ITALY www.mapei.it		
14 CPR-IT1/0480 EN 15651-1 F-EXT-INT-CC EN 15651-2 G-CC EN 15651-3 XS 1 MAPESIL AC (New colors) Silicone sealant for non–structural internal and external use in façade elements and glazing applications, also in cold climates, and in sanitary areas			
Conditioning: method A Substrate: Glass with CLEANPRIMER 1226			
	EN 15651-1	EN 15651-2	EN 15651-3
Reaction to fire Release of dangerous substances	Class E See SDS		
Water tightness and air tightness: – Resistance to flow – Loss of volume – Tensile properties at maintained extension after immersion in water – Secant tensile modulus at -30°C – Tensile properties at maintained extension -30°C – Adhesion and cohesion properties after exposure to heat, water and artificial light – Elastic recovery Microbiological growth Durability	≤ 3 mm ≤ 10 % Pass ≤ 0,9 MPa Pass == == == Pass	≤ 3 mm ≤ 10 % == ≤ 0,9 MPa Pass Pass ≥ 60% == Pass	≤ 3 mm ≤ 10 % Pass == == == 0 Pass

CE reminder printed on the cartridge

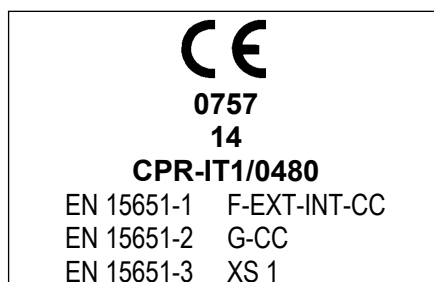

Note:

MAPEI supplies the current annex along with the DoP to make the consultancy of the CE marking easier for the international clients. The enclosed CE marking can be slightly different compared to the one printed on the relevant packaging or documentation because of:

- graphic adaptations due to lack of space on the packaging or printing methods used,
- different language (the same packaging can be shared by several countries),
- the product is already in stock when the updating of the CE marking is implemented,
- printing mistakes.