





• stair nosings profiles

# PROSTAIR ACC

SATINED STAINLESS STEEL AISI 304/1.4301-V2A

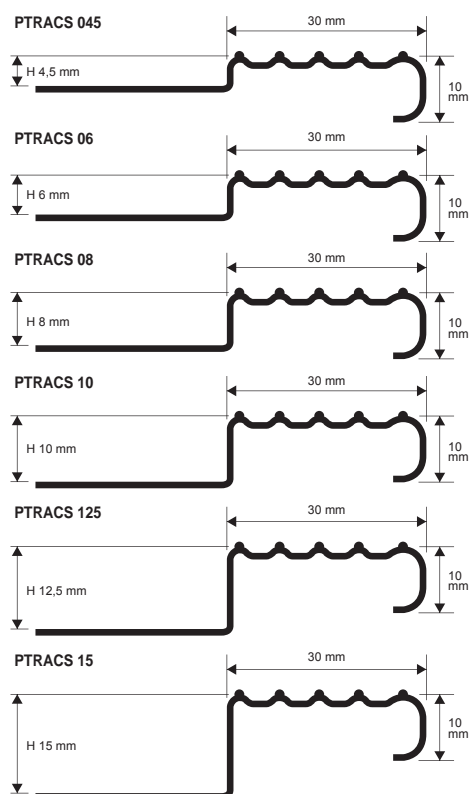

## EXAMPLES OF LAYING

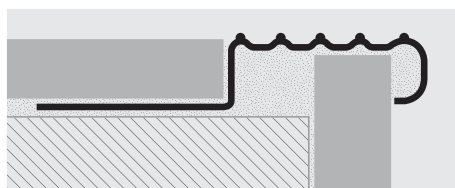

PROSTAIR ACC is steps protecting technical profile, designed and conceived to make the step scales made of ceramic, porcelain stoneware and others nonskid and non-slip ones : it's to be applied before the step laying process. Manufactured in aisi 304/1.4301-V2A glazed stainless steel, with the superior side level crimped in order to increase its adhesion. It replaces special ceramic elements in refined, resistant and economic way. It is compulsory in public places for the accident prevention. It is recommended for elegant, refined industrial, commercial and private environments: available in H 4,5-6- 8-10-12,5-15 mm versions. Combining with the entire series of steel profiles recommended.



**SATINED STAINLESS STEEL AISI 304/1.4301-V2A with protective film** bar length 2,7 LM - pack. 15 Pcs - 40,5 LM - 10/10mm

Article	H mm	€/LM	€/Pc
PTRACS 045	4,5	13,35	36,05
PTRACS 06	6	13,75	37,13
PTRACS 08	8	14,07	37,99
PTRACS 10	10	14,48	39,10
PTRACS 125	12,5	14,99	40,47
PTRACS 15	15	15,71	42,42

Available in SATINED STAINLESS STEEL AISI 316L/1.440-V4A (available with a minimum quantity order of 540 LM - price and delivery time to be agreed).

## OUT OF STANDARD SIZE PRICES:

For Length 1 LM + 10% (minimum order of 300 LM)

For Length 1,5 LM + 5% (minimum order of 300 LM)

## LAYING INSTRUCTIONS

1. Choose the PROSTAR ACC of the desired height and material on the basis of the tile (steps) thickness. 2. Fix the first rising part laying it down at its appropriate and definitive level. 3. Fill completely the empty spaces under the profile with the tile adhesive. 4. Spread out the adhesive on the tread, lay down the profile with its cut base immersed completely in adhesive and align it so that the profile covers the riser tile edge. 5. Lay down the tread tiles and align them with the superior grazing part of the profile by drawing its back close and filling the inner space with the adhesive.




**END CAP in VARNISHED PLASTIC STAINED STAINLESS STEEL EFFECT**


pack. 2 Pcs (1 right and 1 left)

Article	H mm	€/Pack.
TPTRACS/2	4,5÷15	2,50

Articles not for sale singly




TPTRACS/2



TPTRACS/2

## COLOURS



ACS - Satined stainless steel  
AISI 304/1.4301-V2A

(for a precise assessment of colours and finishes, see the relative enclosed sheet)


## SUITABLE FOR USE IN CONTACT WITH FOODSTUFFS

PROSTYLE 2610 is steps protecting technical profile, designed and conceived to keep the step scales made of ceramic, porcelain stoneware, wood, marble and others nonskid and non-slip ones : it's to be applied after the step laying process or in the already present rooms. Manufactured in aisi 304/1.4301-V2A glazed stainless steel, with the superior side level crimped in order to increase its adhesion. It replaces special ceramic elements in refined, resistant and economic way. It's ideal for the edges protection and screening as well as of the corner between the rising and the tread which is the point of the greatest strain. It is compulsory in public places for the accident prevention. It is recommended for elegant, refined industrial, commercial and private environments. Available in drilled version or in with adhesive one.


# PROSTYLE 2610

SATINED STAINLESS STEEL AISI 304/1.4301-V2A  
SELF ADHESIVE or PUNCHED

PSYACS 2610F/A  
scale 1:1



## EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

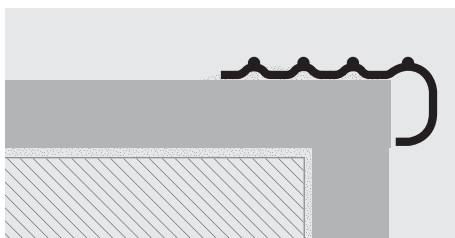

## Adhesive version

1. Choose the suitable profile and cut it to the necessary length. 2. Degrease, wash and clean the solid surface thoroughly. 3. Remove the protective paper from the adhesive. 4. Lay the profile by applying pressure evenly over the whole surface without using a hammer.

## Punched version

1. Choose the suitable profile and cut it to the necessary length. 2. Mark the position of the holes using the existing holes in the profile as reference. 3. Insert the screw anchors into the drilled holes. 4. Fix the profile using flathead screws suitable for the relative slots in the profile.



**SATINED STAINLESS STEEL AISI 304/1.4301-V2A with protective film** bar length 2,7 LM - pack. 20 Pcs - 54 LM - 10/10mm

Article	H mm	€/LM	€/Pc
PSYACS 2610F (punched)	10	11,25	30,38
PSYACS 2610A (with adhesive)	10	13,30	35,91

Available in SATINED STAINLESS STEEL AISI 316L/1.440-V4A (available with a minimum quantity order of 540 LM - price and delivery time to be agreed).

## OUT OF STANDARD SIZE PRICES:

For Length 1 LM + 10% (minimum order of 300 LM)

For Length 1,5 LM + 5% (minimum order of 300 LM)

## SUITABLE FOR USE IN CONTACT WITH FOODSTUFFS




## COLOURS



ACS - Satined stainless steel  
AISI 304/1.4301-V2A

(for a precise assessment of colours and finishes, see the relative enclosed sheet)

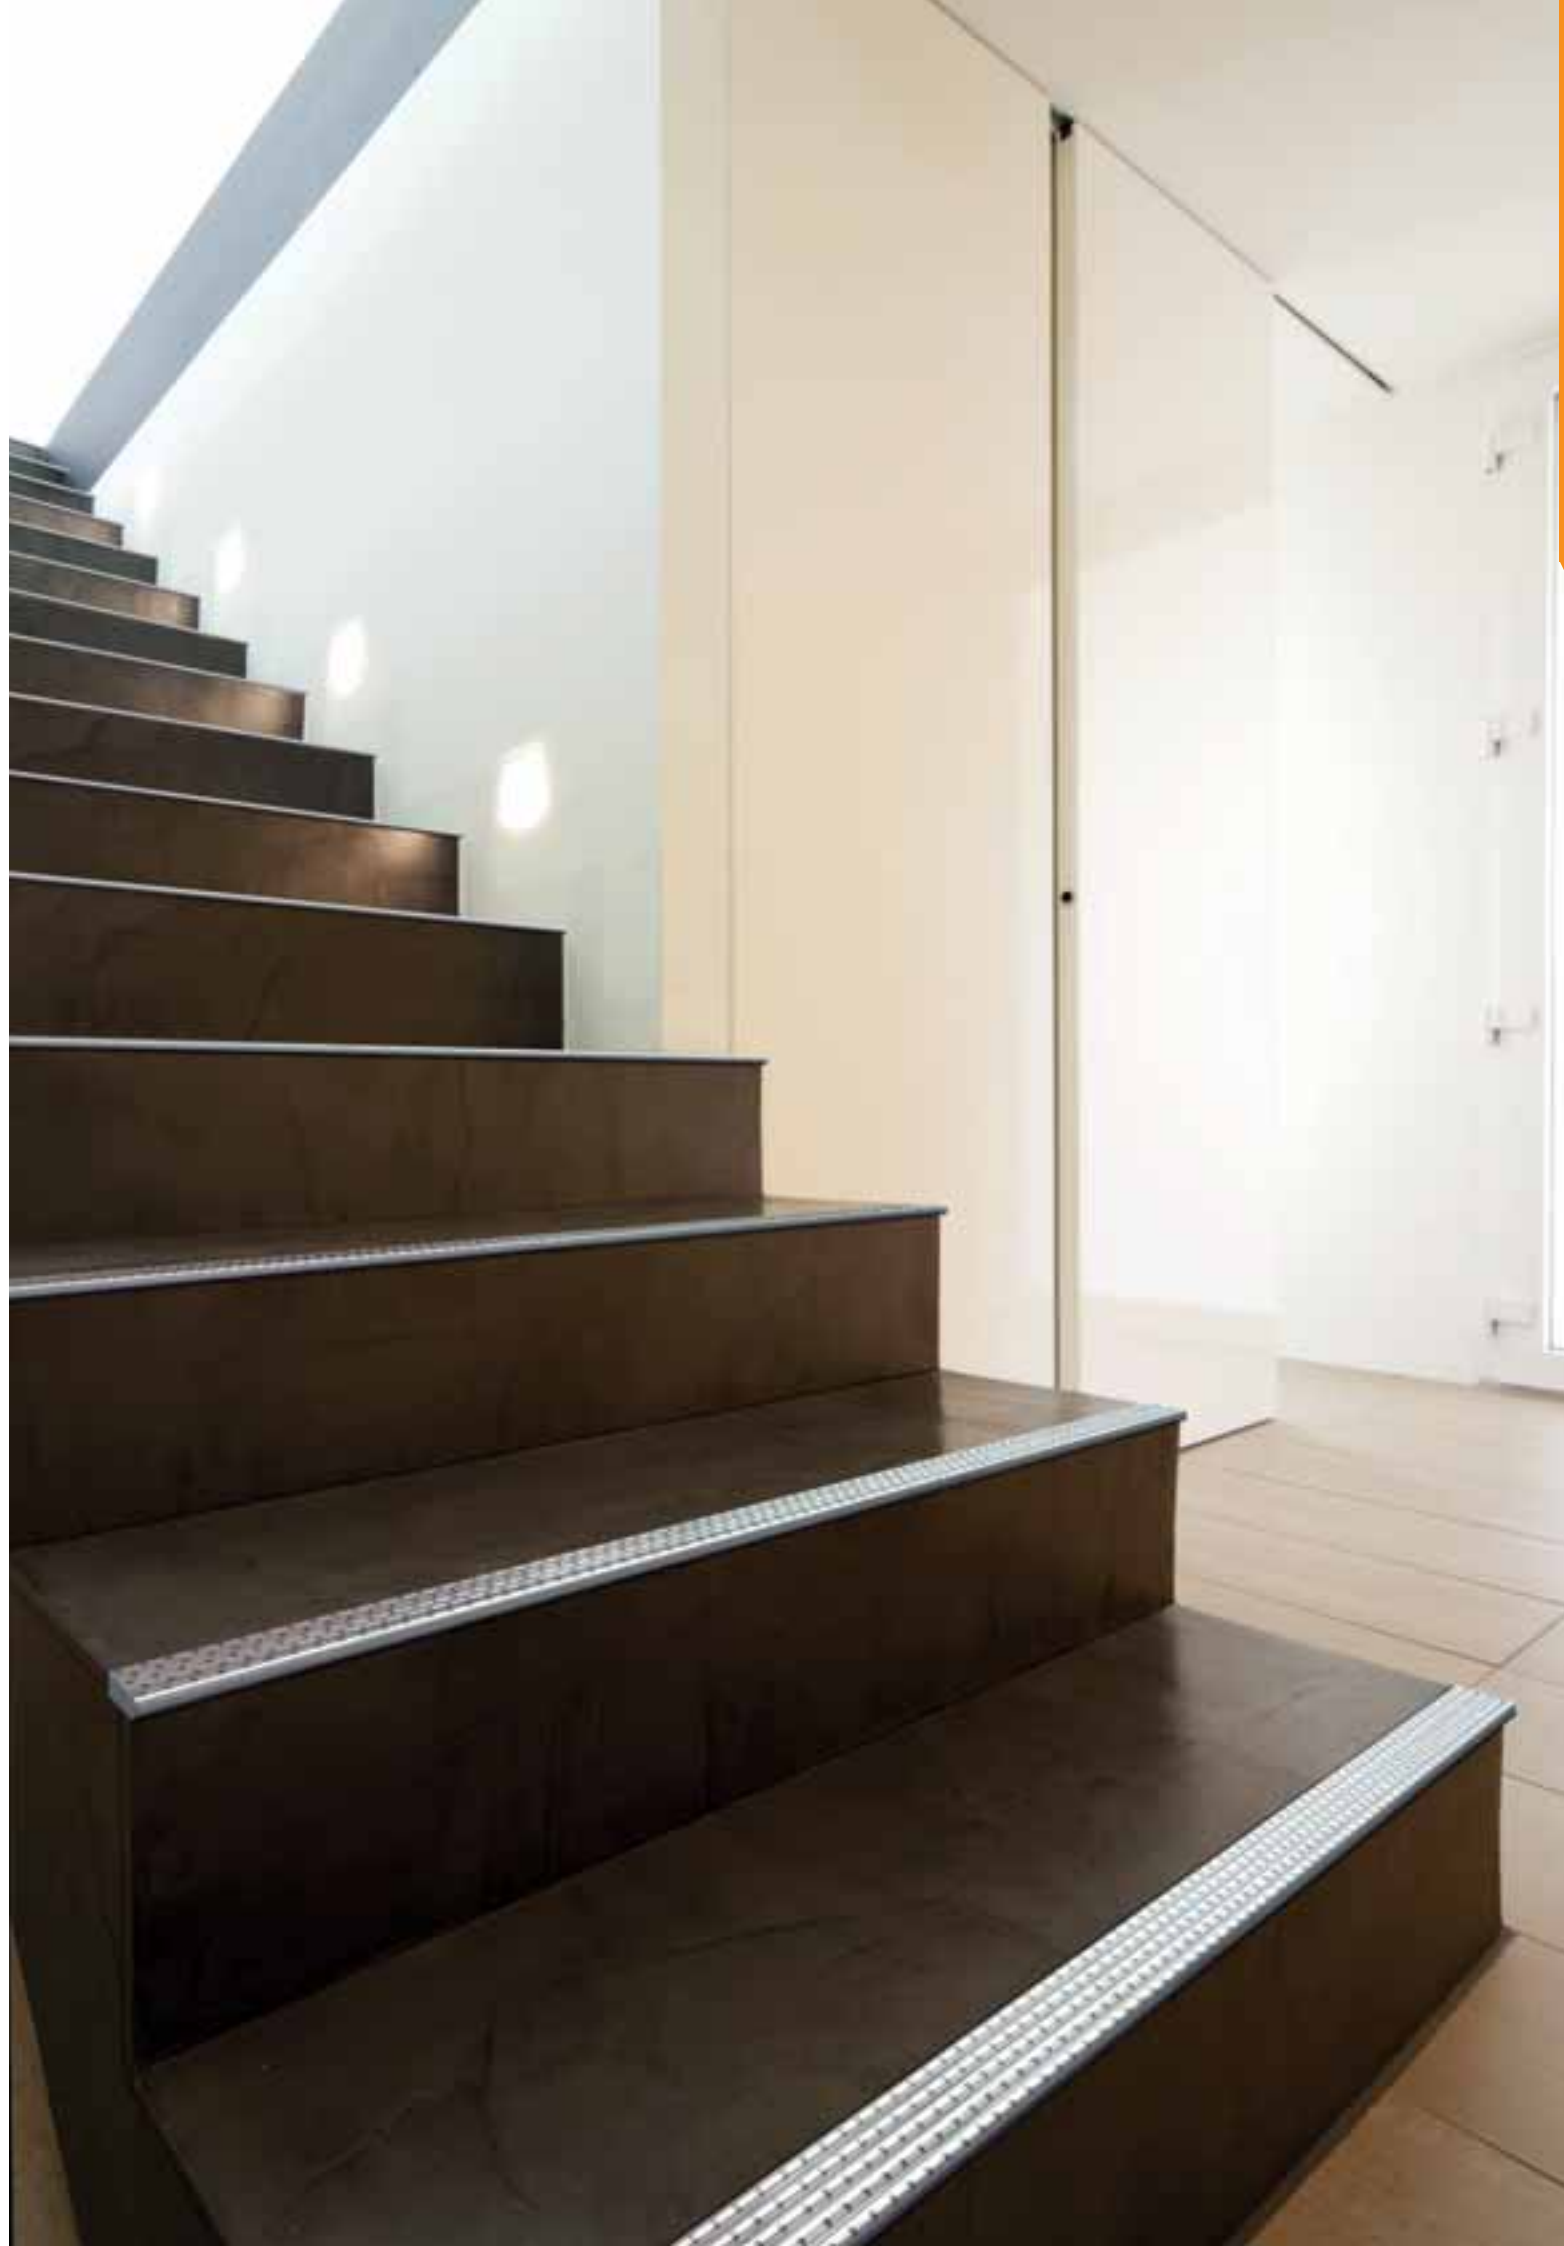







PROSTAIR GRIP ACC is an AISI 304/1.4301-V2A satined stainless steel profile, consisting of a punched flange, ensuring perfect anchorage to the substrate, a 36,5 and 56,5 mm horizontal visually exposed surface with the carborundum stripe insert and a 20 mm vertical visually exposed flat surface. The profile is available in the heights 4,5/ 8/ 10/ 12,5/ 15/ 20 mm and is equipped with end caps made of varnished plastic in satined steel-effect finish. The design of this profile together with the completing elements make it an elegant and appreciated solution also for modern stairs.

# PROSTAIR GRIP ACC

SATINED STAINLESS STEEL  
AISI 304/1.4301 -V2A

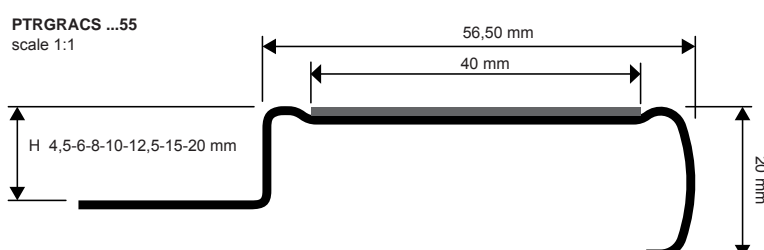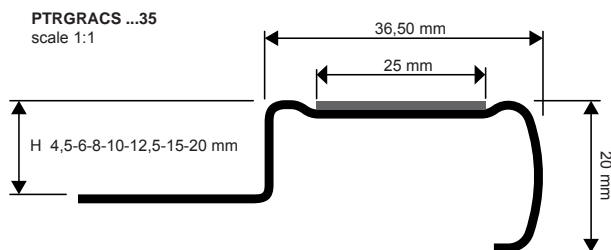

**SATINED STAINLESS STEEL AISI 304/1.4301 - V2A**  
Bar length 2,7 ML - width 36,50 mm - Pack 40 Pcs - 108 LM

Article	H mm	€/LM	€/Pc
PTRGRACS 04535	4,5	26,50	71,55
PTRGRACS 0635	6	26,85	72,50
PTRGRACS 0835	8	27,10	73,17
PTRGRACS 1035	10	28,50	76,95
PTRGRACS 12535	12,5	30,15	81,41
PTRGRACS 1535	15	31,85	86,00
PTRGRACS 2035	20	34,90	94,23

**SATINED STAINLESS STEEL AISI 304/1.4301 - V2A**  
Bar length 2,7 ML - width 56,50 mm - Pack 40 Pcs - 108 LM

Article	H mm	€/LM	€/Pc
PTRGRACS 04555	4,5	31,75	85,73
PTRGRACS 0655	6	32,50	87,75
PTRGRACS 0855	8	33,25	89,78
PTRGRACS 1055	10	34,50	93,15
PTRGRACS 12555	12,5	36,50	98,55
PTRGRACS 1555	15	38,00	102,60
PTRGRACS 2055	20	41,00	110,70

The adhesive carborundum strip (PROGRIP) is not included with the profile.  
For PTRGRACS ...35 order PGR... 25 (Specify the chosen colour).  
For PTRGRACS ...55 order PGR... 40 (Specify the chosen colour).

## COLOURS



(for a precise assessment of colours and finishes, see the relative enclosed sheet)


**END CAPS - R/L - Pack 2 pcs - (1 R and 1 L)**

Article	H mm	L mm	€/pack.
TPTRGRACS 55/2	4,5÷20	56,5	2,50
TPTRGRACS 35/2	4,5÷20	36,5	2,50

Articles not for sale singly



## EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

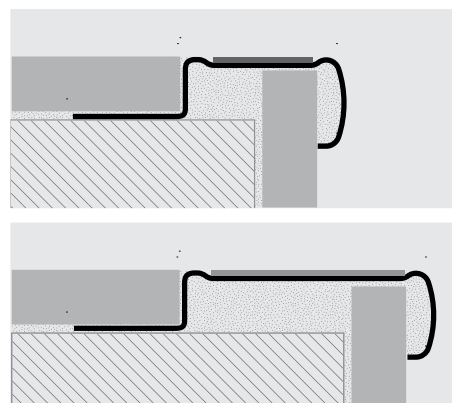


1. Choose the PROSTAIR GRIP ACC in the required height, according to the thickness of the floor covering and the desired profile width; 2. Lay the floor covering on the stair riser and apply the adhesive on the of stair tread, where the profile will be installed; 3. Fill the empty spaces under the profile with the adhesive for tiles. Lay the profile on the step tread, making sure that it is aligned with the stair riser; 4. Lay the floor covering on the stair tread and align; 5. Plaster the joints between the profile and the tiles.

## SUITABLE FOR USE IN CONTACT WITH FOODSTUFFS

PROGRIP is a carborundum adhesive stripe, consisting of an elastic film coated with high wear resistant abrasive grains. It is usually employed in public as well as in domestic environments to make stair steps non-slip. The stripe is available in different colors and widths to meet any technical and aesthetic requirement. If PROGRIP is applied directly on the step covering, it is advisable to apply two stripes on each step, rounding their ends.

The PGRT (trasparent) are not suitable for outside use.

## COLOURS

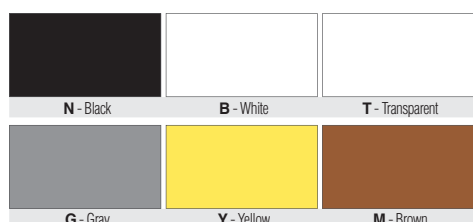

(for a precise assessment of colours and finishes, see the relative enclosed sheet)

**ADHESIVE CARBORUNDUM NON-SLIP STRIP for STEPS**  
rolls length 18,3 LM

Article	Width mm	€/LM	€/Roll
PGRN 25 (black colour)	25	2,05	37,31
PGRB 25 (white colour)	25	3,08	56,06
PGRT 25 (transparent)	25	2,05	37,31
PGRG 25 (grey colour)	25	3,49	63,52
PGRY 25 (yellow colour)	25	3,39	61,70
PGRM 25 (brown colour)	25	2,36	42,95
PGRN 40 (black colours)	40	3,08	56,37
PGRB 40 (white colours)	40	5,46	99,92
PGRT 40 (transparent)	40	3,08	56,37
PGRG 40 (gray colours)	40	6,14	112,36
PGRY 40 (gray colours)	40	6,14	112,36
PGRM 40 (brown colours)	40	3,56	65,15

PGRN 40




News 2015 available from April




# PROSTYLE GRIP ACC

SATINED STAINLESS STEEL  
AISI 304/1.4301 -V2A


PROSTYLE GRIP ACC is a non-slip profile in AISI 304/1.4301-V2A satined stainless steel, consisting of a 40 or 60 mm horizontal top with a groove for the insertion of a non-slip carborundum stripe and a 20mm vertical flat side. The profile can be fixed with adhesive film or with screws. The particular design of this profile makes it an elegant and appreciated solution also for modern stairs.

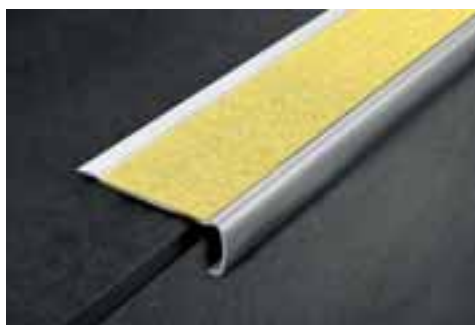



PSYGRACS 6020  
scale 1:1

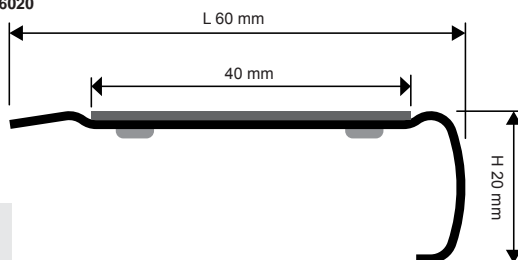

PSYGRACS 4020  
scale 1:1

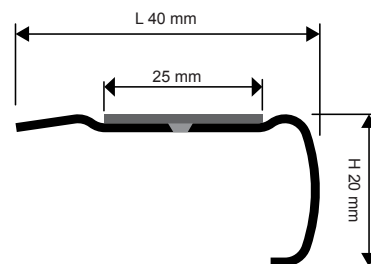

## EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

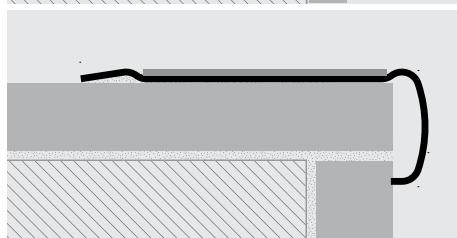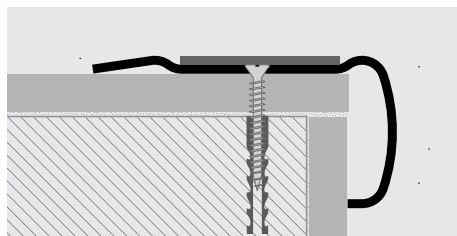

### • Version with adhesive

1.Choose the profile according to the desired width and cut it to the necessary length; 2.Clean the surface on which the profile is to be laid, ensuring that it is dry. Remove the protective film and place the profile, applying adequate pressure on it; 3.Apply the adhesive non-slip carborundum insert of the desired color.

### • Punched version

1.Choose the profile according to the desired width and cut it to the necessary length; 2.Mark the position of the holes using the existing holes on the profile as reference; 3.Drill the step using a drill with 5mm diameter and insert the 5x25mm screws; 4.Screw the profile to the step; 5.Apply the adhesive non-slip carborundum insert of the desired color.

**SATINED STAINLESS STEEL AISI 304/1.4301 - V2A**  
with protective film - bar length 2,7 ML - Pack 20 Pcs - 54 LM

Article	L mm	€/LM	€/Pc
PSYGRACS 6020A	60	28,90	78,03
PSYGRACS 6020F	60	27,60	74,52

Without adhesive version deduct 3,00 €/LM to the gross price;

**SATINED STAINLESS STEEL AISI 304/1.4301 - V2A**  
with protective film - bar length 2,7 ML - Pack 20 Pcs - 54 LM

Article	L mm	€/LM	€/Pc
PSYGRACS 4020A	40	24,50	66,15
PSYGRACS 4020F	40	23,00	62,10

Without adhesive version deduct 3,00 €/LM to the gross price;

The adhesive carborundum strip (PROGRIP) is not included with the profile.  
For PSYGRACS 6020A/F order PGR... 40 (Specify the chosen colour).  
For PSYGRACS 4020A/F order PGR... 25 (Specify the chosen colour).

## COLOURS



(for a precise assessment of colours and finishes, see the relative enclosed sheet)

**END CAPS - R/L** - Pack 2 pcs - (1 R and 1 L)

Article	L mm	€/pack.
TPSYGRACS 6020	60	2,50
TPSYGRACS 4020	40	2,50

Articles not for sale singly

## SUITABLE FOR USE IN CONTACT WITH FOODSTUFFS

# PROGRIP

ADHESIVE CARBORUNDUM - 6 COLOURS

PGRN 40



**ADHESIVE CARBORUNDUM NON-SLIP STRIP for STEPS**  
rolls length 18,3 LM

Article	width mm	€/LM	€/Roll
PGRN 25 (black colour)	25	2,05	37,31
PGRB 25 (white colour)	25	3,08	56,06
PGRT 25 (transparent)	25	2,05	37,31
PGRG 25 (grey colour)	25	3,49	63,52
PGRY 25 (yellow colour)	25	3,39	61,70
PGRM 25 (brown colour)	25	2,36	42,95
PGRN 40 (black colours)	40	3,08	56,37
PGRB 40 (white colours)	40	5,46	99,92
PGRT 40 (transparent)	40	3,08	56,37
PGRG 40 (gray colours)	40	6,14	112,36
PGRY 40 (gray colours)	40	6,14	112,36
PGRM 40 (brown colours)	40	3,56	65,15

The PGRT (trasparent) are not suitable for outside use.

## COLOURS

N - Black	B - White	T - Transparent
G - Gray	Y - Yellow	M - Brown

(for a precise assessment of colours and finishes, see the relative enclosed sheet)

PROSTAIR 50 is a technical square used to make the step nonskid and non-slip, protects the ceramic stairs steps preventing from accidents. It is made up of a rigid ALUMINIUM base equipped with a particular toothing on the vertical stem which strengthens the anchorage of the adhesive/tile to the square. The aluminium base varies according to the thickness of the tile used in the step, and to a lined insert in vinyl rubber available in several colors. The insert is already applied to the aluminium base. It is compulsory in public places in compliance with EEC norms and prevents from accidents.

## PROSTAIR 50


NATURAL ALUMINIUM  
+ VINYL RESIN / RUBBER INSERT



**NATURAL ALUMINIUM + VINYL RESIN / RUBBER INSERT**  
bar length 2,7 LM - pack. 20 Pcs - 54 LM

Article	H mm	€/LM	€/Pc
PTR50 08...	8	16,42	44,33
PTR50 10...	10	17,09	46,14
PTR50 125...	12,5	17,61	47,55
PTR50 15...	15	18,51	49,98


Available in the colours: G - N - B - A. The code of the selected colour must be added to the article code.  
E.g.: PTR50 08... (chosen colour Grey) PTR50 08G.

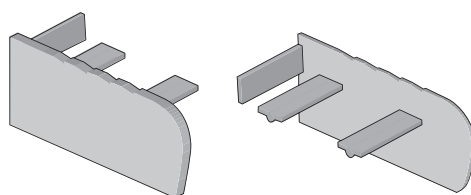


**END CAP IN PVC** - pack. 2 Pcs - (1 R - 1 L)

Article	H mm	€/pack
TPTR50 ...	8-10-12,5-15	2,50

Available in the colours: G - N - B - A. The code of the selected colour must be added to the article code.  
E.g.: TPTR 50... (chosen colour Grey) TPTR 50G.  
Articles not for sale singly

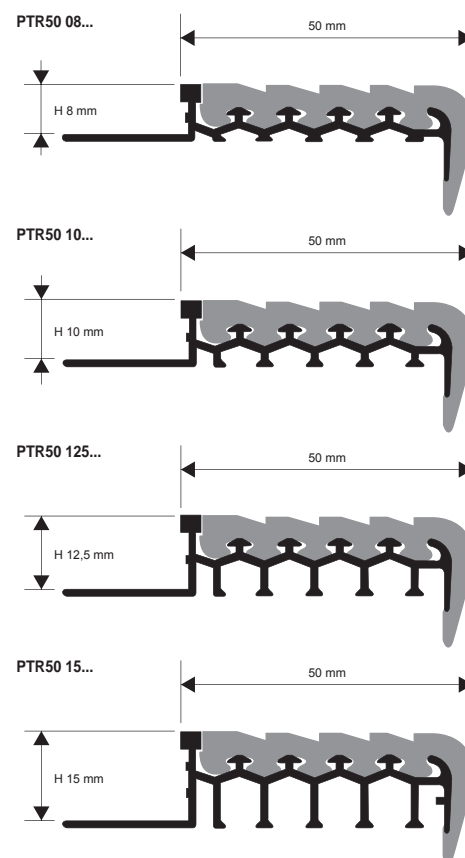

### EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

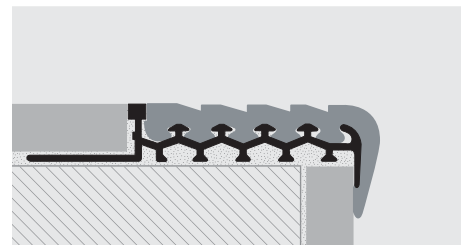

1. Choose a PROSTAIR 50 height and color corresponding to the thickness of the tile. 2. Fix the riser laying it at the appropriate and definitive height. 3. Fill the empty spaces under the square completely with adhesive. 4. Rest the adhesive on the tread, lay the square with the base cut in the adhesive and line it up so that the square covers the tile edge of the riser. 5. Lay the tiles of the tread lining them up with upper part of the square so that it meets with the edge.

### COLOURS

(for a precise assessment of colours and finishes, see the relative enclosed sheet)



## INTERCHANGEABLE INSERT for Prostair 50

VINYL RESIN / RUBBER

**INTERCHANGEABLE VINYL RESIN / RUBBER INSERT**  
bar length 2,7 LM - pack. 20 Pcs - 54 LM

Article	H mm	€/LM	€/Pc
PTG50...	8-10-12,5-15	5,70	15,39


Universal insert suitable for four profile heights.  
Available in the colours: G - N - B - A. The code of the selected colour must be added to the article code.  
E.g.: PTG50... (chosen colour Grey) PTG50 G.




# PROSTAIR

NATURAL ALUMINIUM  
+ VINYL RESIN / RUBBER INSERT

PROSTAIR is a step nosing profile used to improve slip and slide resistance on the step, to protect ceramic steps and to prevent accidents. It consists of a rigid ALUMINIUM base and a changeable vinyl rubber insert available in various colours and widths. Compulsory in public environments to comply with EEC accident-prevention standards.

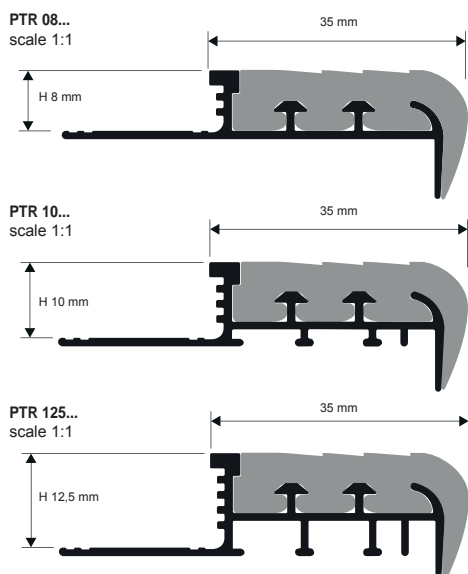

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

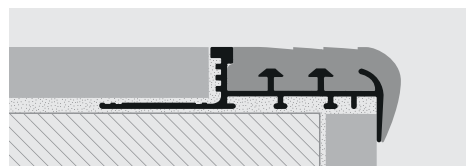

1. Choose the PROSTEP/PROSTAIR in the required width and colour according to the thickness of the tile. 2. First fix the riser part, placing it at the correct and final height. 3. Fill the empty spaces under the profile with the tile adhesive. 4. Apply the adhesive to the tread, lay the profile with the punched base fully sunk into the adhesive and align the profile so that its lip covers the edge of the riser tile. 5. Lay the tread tiles, aligning them so that they are flush with the upper and rear part of the profile.




NATURAL ALUMINIUM + VINYL RESIN / RUBBER INSERT  
bar length 2,7 LM - pack. 20 Pcs - 54 LM

Article	H mm	€/LM	€/Pc
PTR 08...	8	10,32	27,86
PTR 10...	10	11,14	30,08
PTR 125...	12,5	11,50	31,05

Available in the colours: G - N - B - A. The code of the selected colour must be added to the article code.  
E.g.: PTR 08... (chosen colour Grey) PTR 08G.

## COLOURS

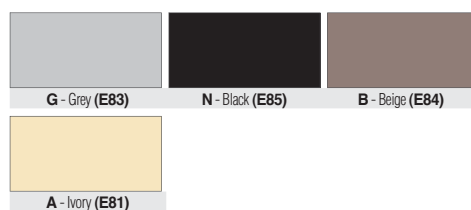


(for a precise assessment of colours and finishes, see the relative enclosed sheet)



INTERCHANGEABLE VINYL RESIN / RUBBER INSERT  
bar length 2,7 LM - pack. 20 Pcs - 54 LM

Article	H mm	€/LM	€/Pc
PTGR 08...	8	3,36	9,07
PTGR 10...	10	3,46	9,34
PTGR 125...	12,5	3,57	9,64

Available in the colours: G - N - B - A. The code of the selected colour must be added to the article code.  
E.g.: PTGR 08... (chosen colour Grey) PTGR 08G.

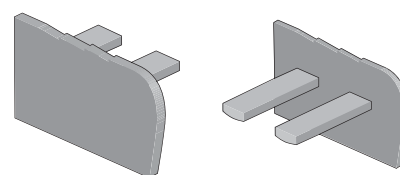

END CAP IN PVC - pack. 2 Pcs - (1 R - 1 L)


Article	H mm	€/pack
TPT 08.../1	8	2,50
TPT 10.../1	10	2,50
TPT 125.../1	12,5	2,50

Available in the colours: G - N - B - A. The code of the selected colour must be added to the article code.  
E.g.: TPT 08... (chosen colour Grey) TPT 08G.  
Articles not for sale singly

# PROSTEP

RIGID VINYL RESIN  
+ VINYL RESIN / RUBBER INSERT

PROSTEP is a step nosing profile used to improve slip and slide resistance on the step, to protect ceramic steps and to prevent accidents. It consists of a rigid base in high-strength vinyl resin and a changeable vinyl rubber insert available in various colours and widths. Compulsory in public environments to comply with EEC accident-prevention standards.

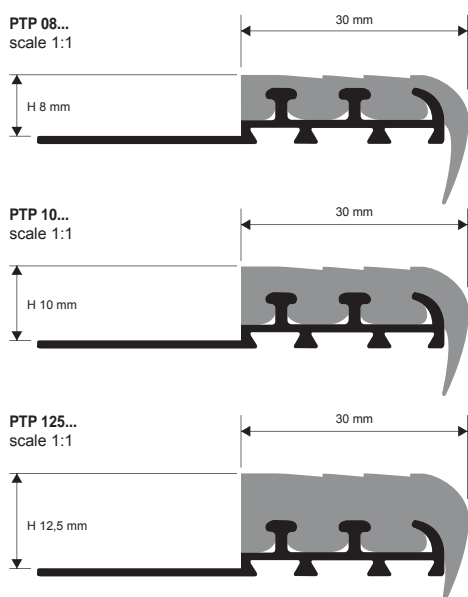

IMPACT PROOF VINYL RESIN + VINYL RESIN / RUBBER INSERT  
bar length 2,7 LM - pack. 20 Pcs - 54 LM

Article	H mm	€/LM	€/Pc
PTP 08...	8	5,16	13,93
PTP 10...	10	5,70	15,39
PTP 125...	12,5	6,19	16,71

Available in the colours: G - N - B - A. The code of the selected colour must be added to the article code.  
E.g.: PTP 08... (chosen colour Grey) PTP 08G.

## COLOURS




(for a precise assessment of colours and finishes, see the relative enclosed sheet)

INTERCHANGEABLE VINYL RESIN / RUBBER INSERT  
bar length 2,7 LM - pack. 20 Pcs - 54 LM

Article	H mm	€/LM	€/Pc
PTG 08...	8	3,35	9,05
PTG 10...	10	3,46	9,34
PTG 125...	12,5	3,57	9,64

Available in the colours: G-N-B-A. The code of the selected colour must be added to the article code. E.g.: PTG 08... (colour Grey) PTG 08G.

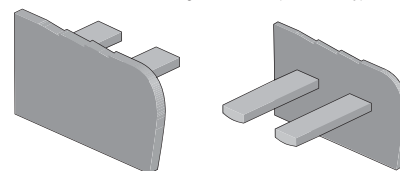

END CAP IN PVC - pack. 2 Pcs - (1 R - 1 L)

Article	H mm	€/pack
TPT 08.../1	8	2,50
TPT 10.../1	10	2,50
TPT 125.../1	12,5	2,50

Available in the colours: G-N-B-A. The code of the selected colour must be added to the article code. E.g.: TPT 08... (colour Grey) TPT 08G.  
Articles not for sale singly



PROBRASTEP is a very elegant step nosing profile used to improve slip and slide resistance on the step. Made in polished brass and anodised aluminium, the upper part is knurled to increase adherence. Compulsory in public buildings to comply with accident-prevention regulations. Recommended for elegant, refined surroundings and for steps in wood, tiles, melamine-coated/laminated wood, marble or natural stones. Width: 8, 10, 12.5 mm.

# PROBRASTEP

KNURLED NATURAL and POLISHED BRASS  
NATURAL and SILVER ANODISED ALUMINIUM



**NATURAL BRASS thermo packed 5 Pcs**  
bar length 2,7 LM - pack. 20 Pcs - 54 LM

Article	H mm	€/LM	€/Pc
PBPON 10	10	19,81	53,49 *
PBPON 125	12,5	20,94	56,54 *

**POLISHED BRASS thermo packed**  
bar length 2,7 LM - pack. 20 Pcs - 54 LM

Article	H mm	€/LM	€/Pc
PBPOL 10	10	22,52	60,80 *
PBPOL 125	12,5	23,64	63,83 *

**NATURAL ALUMINIUM thermo packed 5 Pcs**  
bar length 2,7 LM - pack. 20 Pcs - 54 LM



Article	H mm	€/LM	€/Pc
PBPAN 08	8	4,93	13,31
PBPAN 10	10	5,19	14,01
PBPAN 125	12,5	5,55	14,99

**SILVER ANODISED ALUMINIUM thermo packed**  
bar length 2,7 LM - pack. 20 Pcs - 54 LM


Article	H mm	€/LM	€/Pc
PBPAA 08	8	6,26	16,90
PBPAA 10	10	6,52	17,60
PBPAA 125	12,5	6,88	18,58

## COLOURS

(for a precise assessment of colours and finishes, see the relative enclosed sheet)

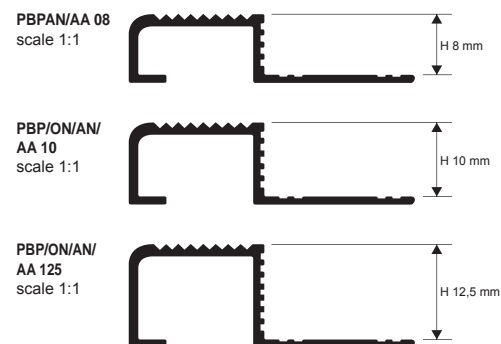

## EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

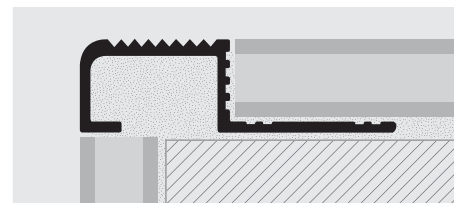

1. Choose the PROBRASTEP in the required width and colour according to the thickness of the tile (stairs). 2. First fix the riser part, placing it at the correct and final height. 3. Fill the empty spaces under the profile with the tile adhesive. 4. Apply the adhesive to the tread, lay the profile with the punched base fully sunk into the adhesive and align the profile so that its lip covers the edge of the riser tile. 5. Lay the tread tiles, aligning them so that they are flush with the upper and rear part of the profile and filling the internal part with adhesive. Oxidation marks in the polished/natural brass range may be easily removed with specific chemical products (Sidel-Smac).




\* = Upon request, delivery time to be agreed.


Prices are referred to whole packs. 10% increase for minimum orders of 10 pcs. 20% increase for orders of less than 10 pcs.

# PROTERMSTEP ACC

POLISHED STAINLESS  
STEEL AISI 304/1.4301-V2A

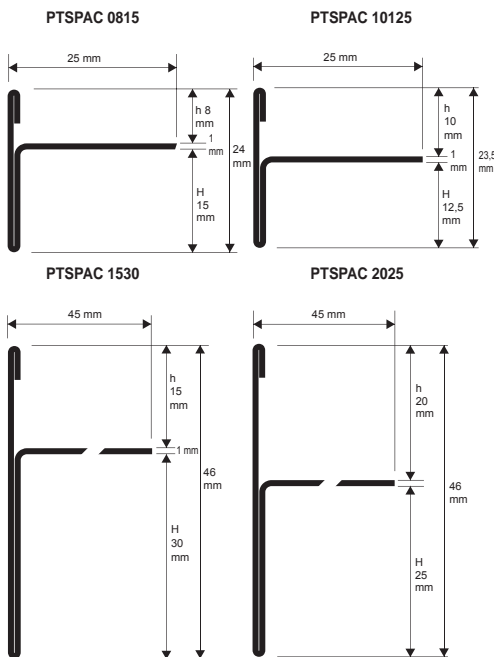

EXAMPLE OF LAYING

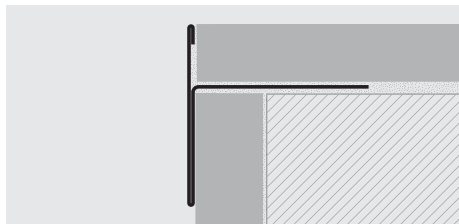

PROTERMSTEP ACC is the new step cover profile made of stainless steel. Designed to protect the edge of the step and to hide the joint between the tread and the step rise. The special notched shape in the upright stem provides it with excellent anchorage between floor/glue/profile. Reversible profile.



POLISHED STAINLESS STEEL AISI 304/1.4301-V2A with protective film  
bar length 2,7 LM - pack. 15 Pcs - 40,5 LM

Article	h / H mm	€/LM	€/Pc
PTSPAC 0815	08 / 15	14,38	38,83
PTSPAC 10125	10 / 12,5	14,38	38,83
PTSPAC 1530	15 / 30	27,52	74,30
PTSPAC 2025	20 / 25	27,52	74,30

CORNER - pack. 10 Pcs

Article	h / H mm	€/pack	€/cond.
REPTSAC 0815	08 / 15	33,63	336,30
REPTSAC 10125	10 / 12,5	33,63	336,30
REPTSAC 1530	15 / 30	33,63	336,30
REPTSAC 2025	20 / 25	33,63	336,30

JOINT - H 10 - 12,5 - 15 - 20 mm - pack. 10 Pcs

Article	h / H mm	€/pack	€/cond.
GIPTSAC 0815	08 / 15	6,16	61,60
GIPTSAC 10125	10 / 12,5	6,16	61,60
GIPTSAC 1530	15 / 30	6,16	61,60
GIPTSAC 2025	20 / 25	6,16	61,60

SUITABLE FOR USE IN CONTACT WITH FOODSTUFFS




COLOURS




AC - Polished stainless steel  
AISI 304/1.4301-V2A

(for a precise assessment of colours and finishes, see the relative enclosed sheet)

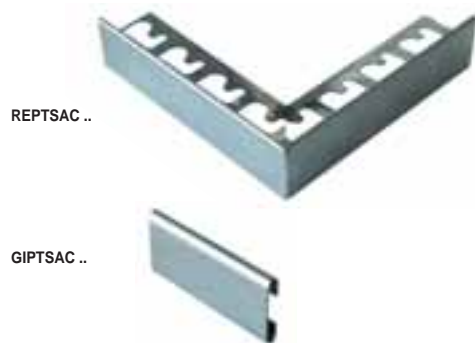


# PROTERMSTEP ALL

NATURAL and SILVER ANODISED  
ALUMINIUM

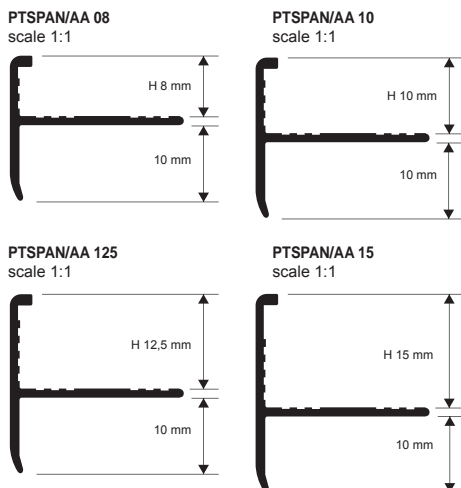

EXAMPLE OF LAYING

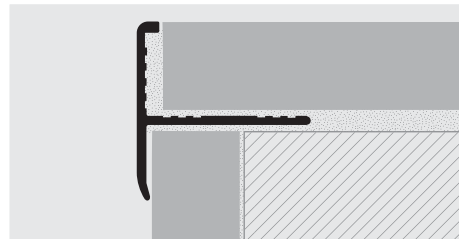

NATURAL ALUMINIUM

bar length 2,7 LM - pack. 20 Pcs - 54 LM

Article	H mm	€/LM	€/Pc
PTSPAN 08	8	2,72	7,34
PTSPAN 10	10	2,82	7,61
PTSPAN 125	12,5	2,98	8,05
PTSPAN 15	15	3,24	8,75

LAYING INSTRUCTIONS

1. Choose the PROTERMSTEP in the required width and colour according to the thickness of the tile (stairs). 2. First fix the riser part, placing it at the correct and final height. 3. Fill the empty spaces under the profile with the tile adhesive. 4. Apply the adhesive to the tread, lay the profile with the punched base fully sunk into the adhesive and align the profile so that its lip covers the edge of the riser tile. 5. Lay the tread tiles, aligning them so that they are flush with the upper and rear part of the profile and filling the internal part with adhesive.




SILVER ANODISED ALUMINIUM thermo packed

bar length 2,7 LM - pack. 20 Pcs - 54 LM


Article	H mm	€/LM	€/Pc
PTSPAA 08	8	3,59	9,69
PTSPAA 10	10	3,70	9,99
PTSPAA 125	12,5	3,85	10,40
PTSPAA 15	15	4,11	11,10

COLOURS



AN - Natural aluminium AA - Anod. silver alu.


(for a precise assessment of colours and finishes, see the relative enclosed sheet)

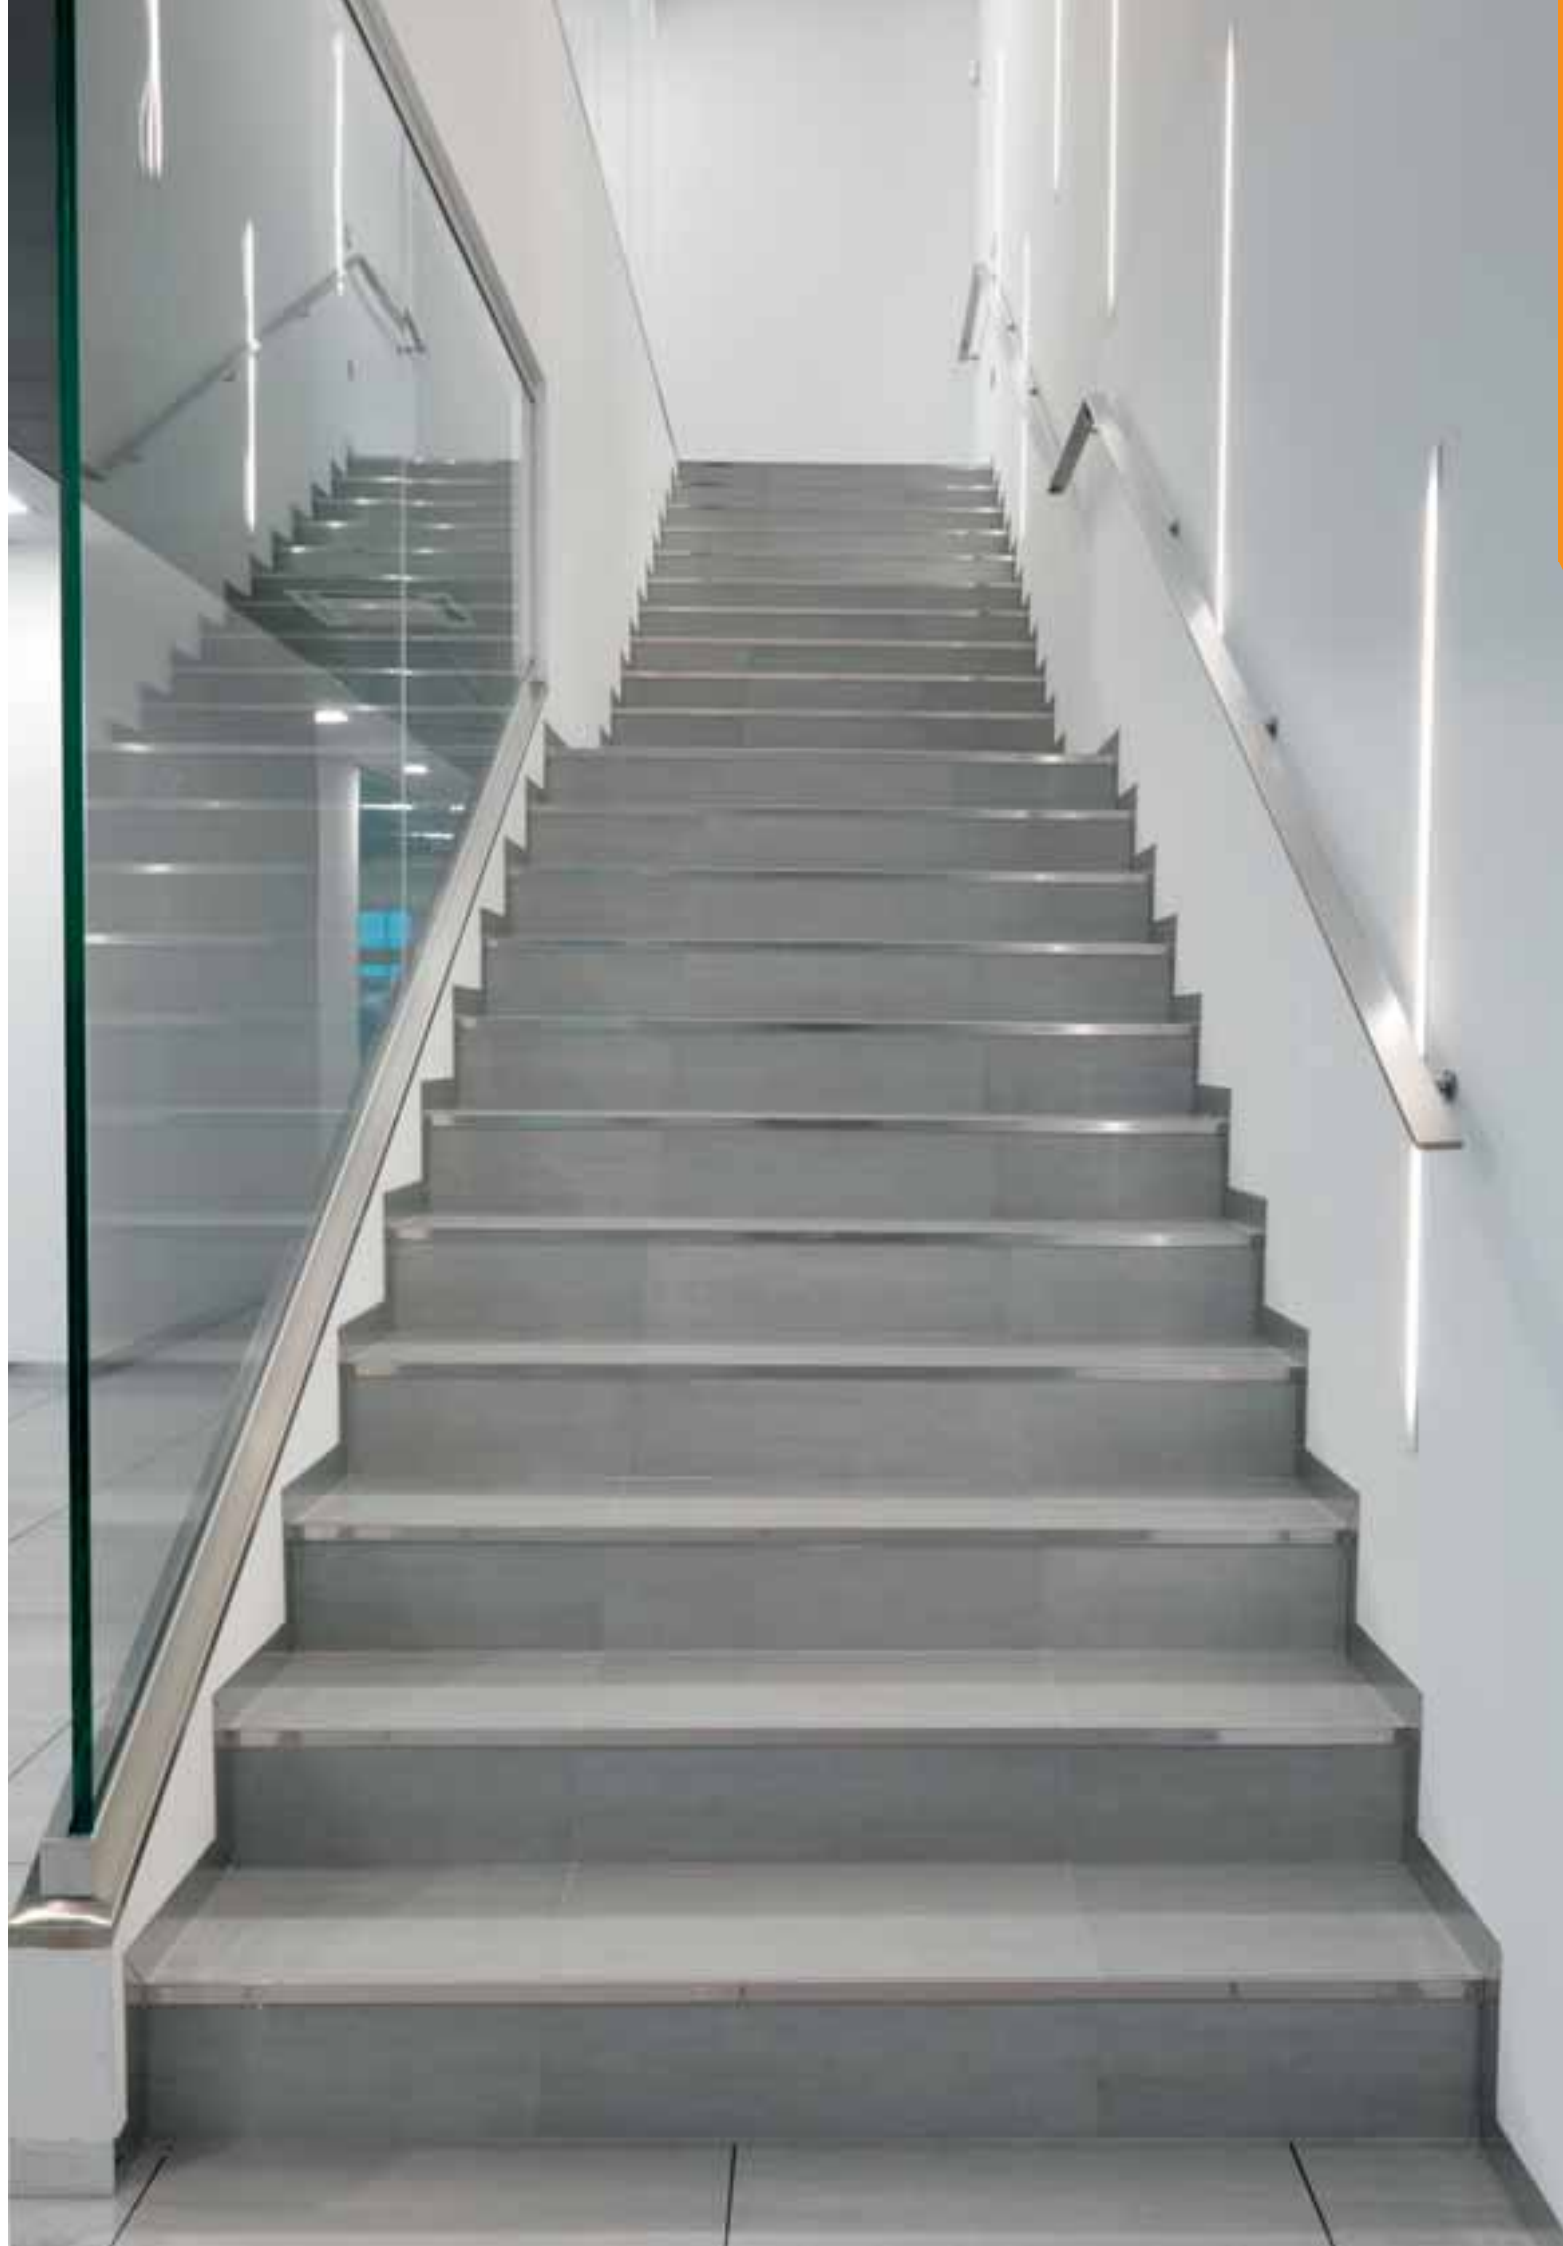




# PROSTAIR LED

ANODISED SILVER ALUMINIUM  
- FLAT - LED

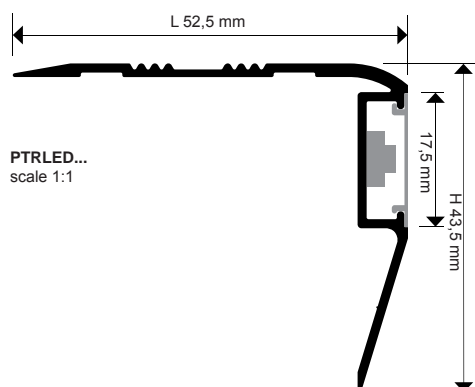

EXAMPLE AND INSTRUCTIONS FOR LAYING METHODS

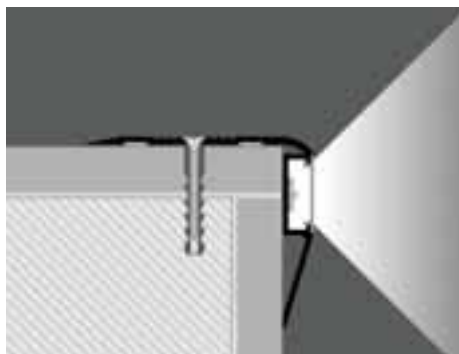

1. Choose PROSTAIR LED depending on the desired finish, light effect and polycarbonate plate; 2. If you are using the version with adhesive, clean first the surface where the profile will be installed. Once the surface has dried, remove the protective film and install the profile, applying adequate pressure on it; 3. If you are using the punched version, place the profile on the step tread and mark the position of the profile holes on the step tread; 4. Drill the step tread and fasten the profile using plugs; 5. Connect the LED to the low tension power supply and install the polycarbonate plate.

PROSTAIR LED is an aluminium profile available in the silver anodised finishes, that can be fixed with adhesive or dowels to the step tread. It has a grooved non-slip 52,5mm wide horizontal surface and an integrated LED lighting system, placed on its 43,5mm high vertical side. The integrated LED system generates cold or warm light and is protected by a matt or transparent polycarbonate plate, provided with a special fixing system, that allows it to be removed any time maintenance on the lighting system should be required. Its design and to the range of finishes available, together with its easy installation make PROSTAIR LED an appreciated solution both in public and in residential spaces.



## ANODISED SILVER ALUMINIUM

Bar Length 2,7 ml - Pack 20 Pcs - 54 LM

ADAPTOR LED, FLAT & LED NOT INCLUDED

Article	H x L mm	€/LM	€/Pc
PTRLEDA 5040	43,5 x 52,5	19,50	52,65

- Adhesive version add 3,00 €/LM to the gross price;

- Punched version add 1,50 €/LM to the gross price.

## ADHESIVE FLEXIBLE LED COIL

length 5 LM - Pack 1 Roll

Article	€/LM	€/Pc
LEDN (neutral light)	17,20	86,00
LEDF (cold light)	17,20	86,00
LEDC (hot light)	17,20	86,00

## COLOURS



AA - Anod. Silver all

(for a precise assessment of colours and finishes, see the relative enclosed sheet)



## POLYCARBONATE'S FLAT

Bar length 2,7 ML - Pack 20 Pcs - 54 LM

Article	Finish	€/LM	€/Pc
PIAL 17	transp.	3,95	10,67
PIAO 17	matt	3,95	10,67

## ENDCAPS- R/L (3 R & 3 L)

Article	H x L mm	€/Pc	€/Pack
TPTRLEDA 5040	43,5 x 52,5	3,50	21,00



## LED ADAPTOR AC/DC 75W - 12V (15 LM)

Article	€/Pc
ALL 7512 (supplies 15 LM)	63,00

## LED ADAPTOR AC/DC 25W - 12V (5 LM)


Article	€/Pc
ALL 2512 (supplies 5 LM)	43,20





# PROSTYLE

ROUNDED STEP NOSING  
STAINLESS STEEL AISI 304/1.4301-V2A

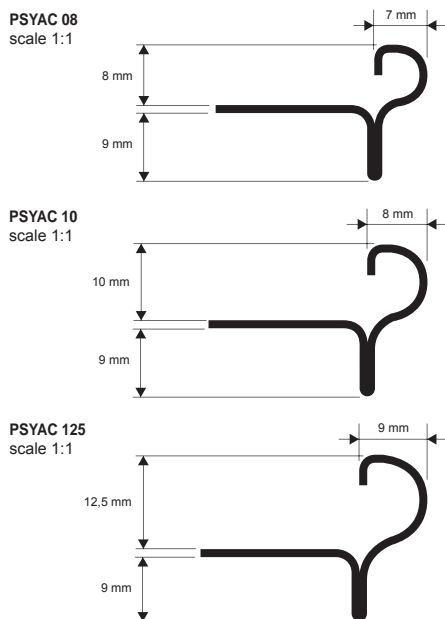

PROSTYLE is a technical/decorative profile in stainless steel AISI 304/1.4301-V2A for ceramic tile/wood steps. Its particular rounded shape has been conceived to create the "torus" of the step, which is normally created with special pieces. Elegant profile for all public/private environments.

In order to perfect placing and to look after details, external angles and closing caps are available.



POLISHED STAINLESS STEEL AISI 304/1.4301-V2A with protective film  
bar length 2,7 LM - pack. 20 Pcs - 54 LM - 10/10mm


Article	H mm	€/LM	€/Pc
PSYAC 08	8	12,53	33,83
PSYAC 10	10	12,92	34,88
PSYAC 125	12,5	13,57	36,64

## COLOURS



AC - Polished stainless steel  
AISI 304/1.4301-V2A

## EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

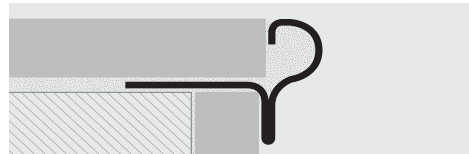


1. Choose the PROSTYLE with suitable height for the thickness of the floor (stairs). 2. Apply the adhesive onto the area of application of the profile. 3. Lay and align the profile, cut to the necessary length, pressing the perforated flange into the adhesive. 4. Lay the tiles, aligning them so that the top edge of the profile is "flush" with the tile. 5. Fill the profile/tile area of contact with adhesive to prevent the accumulation of water in any voids.

SUITABLE FOR USE IN CONTACT WITH FOODSTUFFS

## JOINTS and END CAPS for Prostyle stainless steel

VARNISHED PLASTIC STEEL EFFECT and STAINLESS STEEL

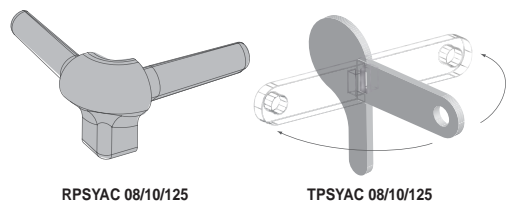

RPSYAC 08/10/125

TPSYAC 08/10/125

JOINT in VARNISHED PLASTIC STEEL EFFECT - pack. 20 Pcs


Article	€/Pc	€/pack.
RPSYAC 08	6,16	123,20
RPSYAC 10	6,16	123,20
RPSYAC 125	6,16	123,20

END CAPS in STAINLESS STEEL H 8 - H 10 - H 12,5 mm - pack. 20 Pcs

Article	€/Pc	€/pack.
TPSYAC 08	2,98	29,80
TPSYAC 10	2,98	29,80
TPSYAC 125	2,98	29,80

# PROSTYLE

KNURLED, ROUNDED STEP NOSING  
NATURAL, POLISHED and CHROMED BRASS

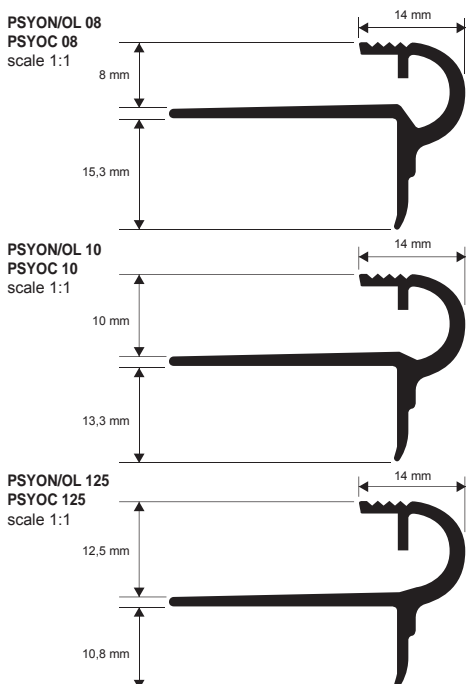


PROSTYLE is a technical/decorative profile in natural brass, as well as with polished or chromed finish, for ceramic tile/wood steps. Its particular rounded shape has been conceived to create the "torus" of the step, which is normally created with special pieces. It is knurled on the top to make the profile non-slip. Elegant profile for all public/private environments. Shrink-wrapped profile with bar code.



CHROMED BRASS thermo packed  
bar length 2,7 LM - pack. 10 Pcs - 27 LM

Article	H mm	€/LM	€/Pc
PSYOC 08	8	24,60	66,42
PSYOC 10	10	25,37	68,50
PSYOC 125	12,5	26,50	71,55

## COLOURS



OC - Chromed Brass OL - Pol. Brass ON - Natural Brass

POLISHED BRASS thermo packed  
bar length 2,7 LM - pack. 10 Pcs - 27 LM

Article	H mm	€/LM	€/Pc
PSYOL 08	8	21,16	57,13
PSYOL 10	10	21,77	58,78
PSYOL 125	12,5	22,90	61,83

NATURAL BRASS thermo packed  
bar length 2,7 LM - pack. 10 Pcs - 27 LM

Article	H mm	€/LM	€/Pc
PSYON 08	8	17,36	46,87
PSYON 10	10	17,97	48,52
PSYON 125	12,5	19,41	52,41




PROSTYLE is a technical/decorative profile for ceramic tile/wood steps made in gold-silver anodised aluminium. Its particular rounded shape has been conceived to create the "torus" of the step, which is normally created with special pieces. It is knurled on the top to make the profile non-slip. Elegant profile for all public/private environments. Shrink-wrapped profile with bar code.

# PROSTYLE


KNURLED, ROUNDED STEP NOSING  
GOLD and SILVER ANODISED ALUMINIUM

## EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

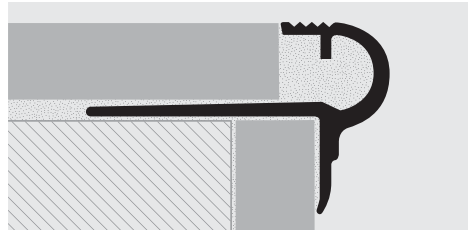

1. Choose the PROSTYLE in the required width and colour according to the thickness of the tile. 2. First fix the riser part, placing it at the correct and final height. 3. Fill the empty spaces under the profile with the tile adhesive. 4. Apply the adhesive to the tread, lay the profile with the punched base fully sunk into the adhesive and align the profile so that its vertical part covers the edge of the riser tile. 5. Lay the tread tiles, aligning them so that they are flush with the upper and rear part of the profile and filling the internal part with adhesive. Oxidation marks in the polished/natural brass range may be easily removed with specific chemical products (Sidel-Smac).

## COLOURS




**SILVER ANODISED ALUMINIUM thermo packed**  
bar length 2,7 LM - pack. 20 Pcs - 54 LM

Article	H mm	€/LM	€/Pc
PSYAA 08	8	7,14	19,28
PSYAA 10	10	7,50	20,25
PSYAA 125	12,5	8,01	21,63

**GOLD ANODISED ALUMINIUM thermo packed**  
bar length 2,7 LM - pack. 20 Pcs - 54 LM

Article	H mm	€/LM	€/Pc
PSYAO 08	8	7,14	19,28
PSYAO 10	10	7,50	20,25
PSYAO 125	12,5	8,01	21,63

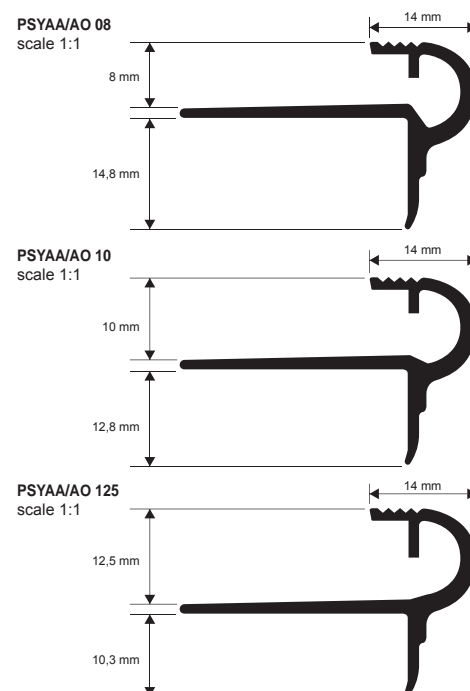

stair nosings  
profiles

## JOINTS and CAPS for Prostyle brass and aluminium

POLISHED and CHROMED BRASS (see page 118) - GOLD and SILVER ANODISED ALUMINIUM

**JOINT in PAINTED PLASTIC** - pack. 20 Pcs


Article	€/Pc	€/pack.
RPSY... 08-10-125	6,16	123,20

Available: OL - OC - AA - AO. The code of the selected colour must be added to the article code. E.g.: RPSY... 08 10 125 (chosen colour Brass) RPSYOL 08-10-125.

**CAPS IN BRASS - ALUMINIUM H 8 - H 10 - H 12,5 mm** - pack. 20 Pcs

Article	€/Pc	€/pack.
TPSY... 08	2,98	59,60
TPSY... 10	2,98	59,60
TPSY... 125	2,98	59,60

Available: OL - OC - AA - AO. The code of the selected colour must be added to the article code. E.g.: TPSY... 08 (chosen colour Brass) TPSYOL 08.

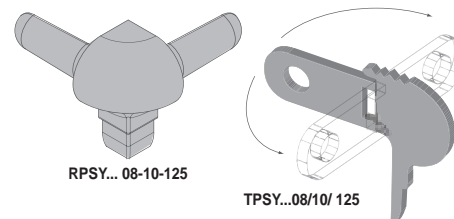

PROSTEP INS is a step cover profile in silver anodised aluminium ideal for protecting and laying laminated wood / floating melaminic and parquets. Available in two heights 10.5 and 16.

## PROSTEP INS

SILVER ANODISED ALUMINIUM



**SILVER ANODISED ALUMINIUM**



bar length 2,7 LM - pack. 40 Pcs - 108 LM

Article	H mm	€/LM	€/Pc
PTSAA 105	10,2	5,24	14,15
PTSAA 16	15,9	5,65	15,26

## COLOURS




## EXAMPLES OF LAYING

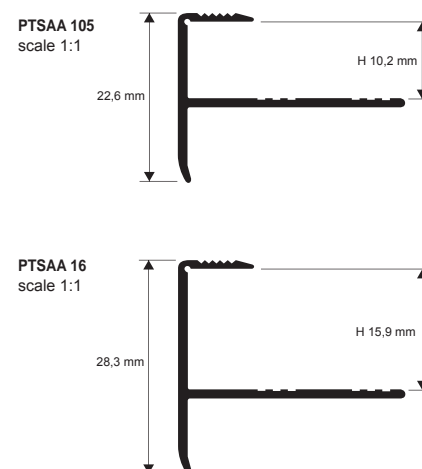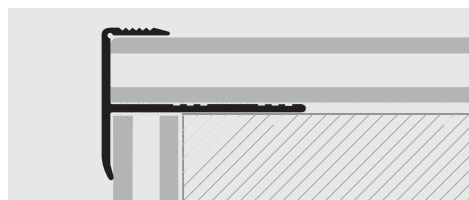


stair nosing profiles

# PROSTAIR WOOD

NATURAL OAK  
+ ALUMINIUM BASE

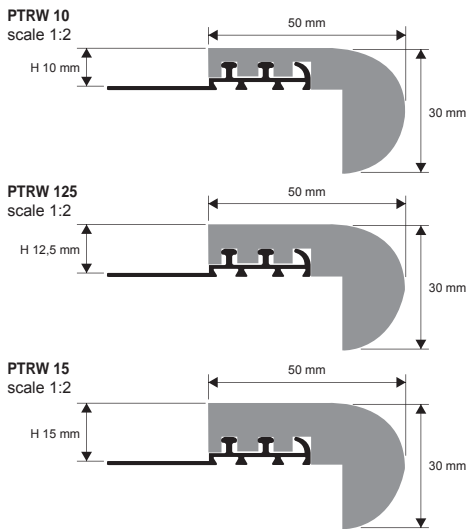

## EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

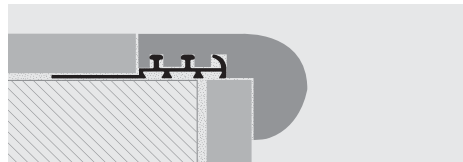

1. Choose the PROSTAIR WOOD with suitable height for the thickness of the covering of the step or staircase. 2. Apply the adhesive onto the area of application of the profile. 3. Lay and align the profile, cut to the necessary length, pressing the perforated flange into the adhesive. 4. Lay the step covering, aligning it so that the top edge of the profile is flush with the covering. 5. Fill the profile/covering area of contact with adhesive to prevent any infiltration.

PROSTAIR WOOD is a step nosing profile in real oak with aluminium base. Its rounded "torus/convex" shape makes a perfect and elegant nosing for stairs and steps in ceramic-tile-terracotta-wood for indoor and outdoor environments. Attractive. PROSTAIR WOOD may be treated and painted subsequently at the time of laying, according to the finishes chosen for the staircase.



## NATURAL OAK + ALUMINIUM BASE

bar length 2,7 LM - pack. 10 Pcs - 27 LM

Article	H mm	€/LM	€/Pc
PTRW 10	10	32,15	86,81
PTRW 125	12,5	34,10	92,07
PTRW 15	15	35,69	96,36

## COLOURS



(for a precise assessment of colours and finishes, see the relative enclosed sheet)



## NATURAL OAK + ALUMINIUM BASE

bar length 1,20-1,80 LM - pack. 10 Pcs - 12/18 LM


Article	H mm	€/Pc
PTRW 1020 (bar length 1,20 LM)	10	46,85
PTRW 12520 (bar length 1,20 LM)	12,5	48,15
PTRW 1520 (bar length 1,20 LM)	15	49,60
PTRW 1080 (bar length 1,80 LM)	10	71,34
PTRW 12580 (bar length 1,80 LM)	12,5	72,24
PTRW 1580 (bar length 1,80 LM)	15	73,12

## ITEMS SUPPLIED ALREADY ASSEMBLED


Treat the wood appropriately with paint or oil.

# PROSTAIR WOOD Z

KNURLED NATURAL OAK  
+ ALUMINIUM BASE

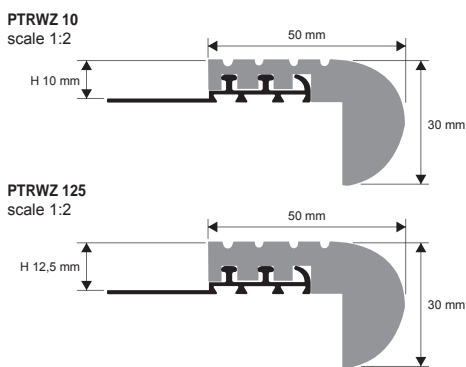

## EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

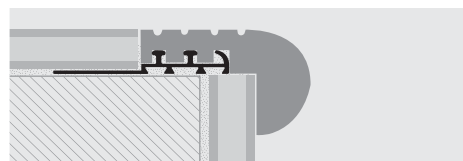

1. Choose the PROSTAIR WOOD Z with suitable height for the thickness of the covering of the step or staircase. 2. Apply the adhesive onto the area of application of the profile. 3. Lay and align the profile, cut to the necessary length, pressing the perforated flange into the adhesive. 4. Lay the step covering, aligning it so that the top edge of the profile is flush with the covering. 5. Fill the profile/covering area of contact with adhesive to prevent any infiltration.

PROSTAIR WOOD Z is a step nosing profile in real oak with aluminium base. The rounded shape of the "knurled convex" torus with non-slip surface makes a perfect and elegant nosing for stairs and steps in ceramic-tile-terracotta-wood for indoor and outdoor environments. Attractive. PROSTAIR WOOD Z may be treated and painted subsequently at the time of laying, according to the finishes chosen for the staircase.



## NATURAL OAK + ALUMINIUM BASE

bar length 2,7 LM - pack. 10 Pcs - 27 LM

Article	H mm	€/LM	€/Pc
PTRWZ 10	10	40,97	110,62
PTRWZ 125	12,5	42,11	113,70

H 15 mm ON REQUEST

## COLOURS



(for a precise assessment of colours and finishes, see the relative enclosed sheet)



## NATURAL OAK + ALUMINIUM BASE

bar length 1,20-1,80 LM - pack. 10 Pcs - 12/18 LM

Article	H mm	€/Pc
PTRWZ 1020 (bar length 1,20 LM)	10	49,16
PTRWZ 12520 (bar length 1,20 LM)	12,5	50,53
PTRWZ 1080 (bar length 1,80 LM)	10	73,75
PTRWZ 12580 (bar length 1,80 LM)	12,5	75,80

## ITEMS SUPPLIED ALREADY ASSEMBLED

Treat the wood appropriately with paint or oil.

Upon request, price and delivery time to be agreed.

PROSTEP WOOD is a step nosing profile in real oak with aluminium base. Its 90° shape makes a perfect and elegant nosing for modern stairs and steps in ceramic-tile-terracotta-wood for indoor and outdoor environments. Attractive. PROSTEP WOOD may be treated and painted subsequently at the time of laying, according to the finishes chosen for the staircase.



#### NATURAL OAK + ALUMINIUM BASE

bar length 2,7 LM - pack. 10 Pcs - 27 LM

Article	H mm	€/LM	€/Pc
PTPW 10	10	36,51	98,58
PTPW 125	12,5	37,49	101,22

H 15 mm ON REQUEST

#### COLOURS



(for a precise assessment of colours and finishes, see the relative enclosed sheet)

#### NATURAL OAK + ALUMINIUM BASE

bar length 1,20-1,80 LM - pack. 10 Pcs - 12/18 LM


Article	H mm	€/Pc
PTPW 1020 (bar length 1,20 LM)	10	37,48
PTPW 12520 (bar length 1,20 LM)	12,5	38,81
PTPW 1080 (bar length 1,80 LM)	10	56,13
PTPW 12580 (bar length 1,80 LM)	12,5	58,18

#### ITEMS SUPPLIED ALREADY ASSEMBLED


Treat the wood appropriately with paint or oil.

## PROSTEP WOOD

NATURAL OAK  
+ ALUMINIUM BASE

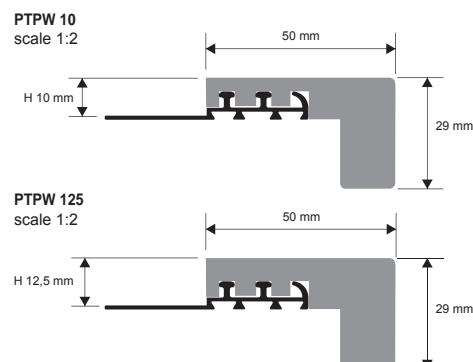

#### EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

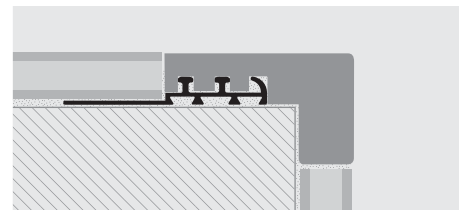

1. Choose the PROSTEP WOOD with suitable height for the thickness of the covering of the step or staircase. 2. Apply the adhesive onto the area of application of the profile. 3. Lay and align the profile, cut to the necessary length, pressing the perforated flange into the adhesive. 4. Lay the step covering, aligning it so that the top edge of the profile is "flush" with the covering. 5. Fill the profile/covering area of contact with adhesive to prevent any infiltration.

## PROSTYLE WOOD

NATURAL OAK  
+ ALUMINIUM BASE

PROSTYLE WOOD è a step nosing profile in real oak with aluminium base. Its rounded "lorus/fret" shape makes a perfect and elegant nosing for stairs and steps in ceramic-tile-terracotta-wood for indoor and outdoor environments. Attractive. PROSTYLE WOOD may be treated and painted subsequently at the time of laying, according to the finishes chosen for the staircase.



#### NATURAL OAK + ALUMINIUM BASE

bar length 2,7 LM - pack. 10 Pcs - 27 LM

Article	H mm	€/LM	€/Pc
PSYW 10	10	35,43	95,66
PSYW 125	12,5	36,46	98,44

H 15 mm UPON REQUEST

#### COLOURS



(for a precise assessment of colours and finishes, see the relative enclosed sheet)


#### NATURAL OAK + ALUMINIUM BASE

bar length 1,20-1,80 LM - pack. 10 Pcs - 12/18 LM


Article	H mm	€/Pc
PSYW 1020 (bar length 1,20 LM)	10	46,85
PSYW 12520 (bar length 1,20 LM)	12,5	48,15
PSYW 1080 (bar length 1,80 LM)	10	70,26
PSYW 12580 (bar length 1,80 LM)	12,5	70,26

#### ITEMS SUPPLIED ALREADY ASSEMBLED

Treat the wood appropriately with paint or oil.

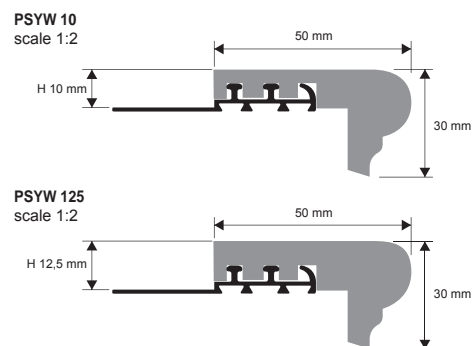

#### EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

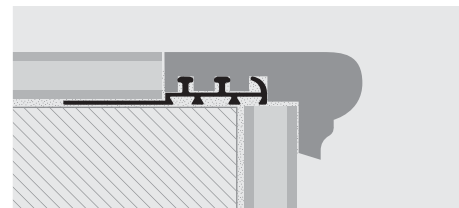

1. Choose the PROSTYLE WOOD with suitable height for the thickness of the covering of the step or staircase. 2. Apply the adhesive onto the area of application of the profile. 3. Lay and align the profile, cut to the necessary length, pressing the perforated flange into the adhesive. 4. Lay the step covering, aligning it so that the top edge of the profile is "flush" with the covering. 5. Fill the profile/covering area of contact with adhesive to prevent any infiltration.




# PROSTYLE KL 10

SILVER ANODISED ALUMINIUM


PROSTYLE KL 10 is a step protecting profile, technical and very elegant, used to keep the step made of thin ceramic tiles and kerlite/laminam non-skid and non-slip. Product in anodised aluminium with the angle portion crimped in order to increase its adhesion. Internal height 4.5 mm. It is compulsory in public buildings to comply with accident-prevention regulations.

steps for low thicknesses

PSYKLAA 1045  
scale 1:1



EXAMPLES OF LAYING

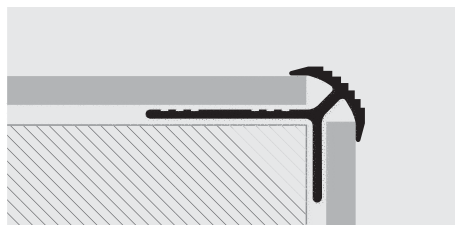

**SILVER ANODISED ALUMINIUM**

bar length 2,7 LM - pack. 40 Pcs - 108 LM

Article	H mm	€/LM	€/Pc
PSYKLAA 1045	4,5	6,73	18,17

**COLOURS**



AA - Anod. silver aluminium

(for a precise assessment of colours and finishes, see the relative enclosed sheet)

**CAPS** - pack. 2 Pcs (1 R - 1 L)

Article	H mm	€/pack.
TPSYKLAA 1045	4,5	2,50

Articles not for sale singly




# PROSTAIR KL 20

SILVER ANODISED ALUMINIUM


PROSTAIR KL 20 is a step protecting profile, technical and very elegant, used to keep the step made of thin ceramic tiles and kerlite/laminam non-skid and non-slip. Product in anodised aluminium with the upper portion crimped in order to increase its adhesion and a lower vertical tab created to cover the riser of the step. It is compulsory in public buildings to comply with accident-prevention regulations. Available height H 4.5 mm.

steps for low thicknesses

PTRKLAA 2045  
scale 1:1

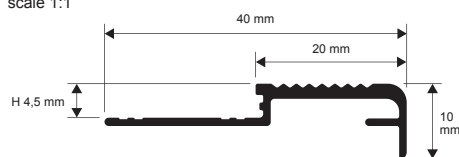

EXAMPLES OF LAYING

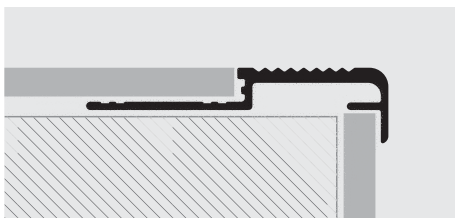

**SILVER ANODISED ALUMINIUM**

bar length 2,7 LM - pack. 40 Pcs - 108 LM

Article	H mm	€/LM	€/Pc
PTRKLAA 2045	4,5	5,60	15,12

**COLOURS**



AA - Anod. silver aluminium

(for a precise assessment of colours and finishes, see the relative enclosed sheet)



TUBE and ACCESSORIES for runners and stair-carpet guides, available in the finishes in polished painted brass, polished gold aluminium and polished chrome aluminium.

## TUBES and ACCESSORIES

GOLD and CHROME POLISHED ALUMINIUM  
POLISHED VARNISHED BRASS



**BLISTER KIT - 2 TUBES and 4 TUBE PLUGS - POLISHED VARNISHED BRASS**  
length tube 0,8 LM - pack. 60 Pcs

Article	Ø mm	€/LM	€/Pc
TCTOL 118S	11		17,13
TCTOL 138S	13		18,60

**BLISTER KIT - 2 TUBES and 4 TUBE PLUGS - POLISHED VARNISHED BRASS**  
length tube 0,9 LM - pack. 60 Pcs

Article	Ø mm	€/LM	€/Pc
TCTOL 119S	11		18,73
TCTOL 139S	13		20,32

**BLISTER KIT - 2 TUBES and 4 TUBE PLUGS - POLISHED VARNISHED BRASS**  
length tube 1 LM - pack. 60 Pcs

Article	Ø mm	€/LM	€/Pc
TCTOL 1110S	11		20,32
TCTOL 1310S	13		22,03



**BLISTER KIT - 2 TUBES and 4 TUBE PLUGS - POLISHED ALUMINIUM**  
length tube 0,8 LM - pack. 60 Pcs

Article	Ø mm	€/LM	€/Pc
TCTBO 128S (poli. gold)	12		12,49
TCTBC 128S (poli. chrome)	12		14,65

**BLISTER KIT - 2 TUBES and 4 TUBE PLUGS - POLISHED ALUMINIUM**  
length tube 0,9 LM - pack. 60 Pcs

Article	Ø mm	€/LM	€/Pc
TCTBO 129S (poli. gold)	12		13,60
TCTBC 129S (poli. chrome)	12		15,75

**BLISTER KIT - 2 TUBES and 4 END CAPS - POLISHED ALUMINIUM**  
length tube 1 LM - pack. 60 Pcs

Article	Ø mm	€/LM	€/Pc
TCTBO 1210S (poli. gold)	12		14,69
TCTBC 1210S (poli. chrome)	12		16,84

TCTOL 11/13S

TCTBO 12S

TCTBC 12S

tube and accessories for stairs

Varnished polished brass is not suitable for places subject to heavy foot-traffic and / or abrasion.

### COLOURS



(for a precise assessment of colours and finishes, see the relative enclosed sheet)

## TUBE for runners and stair-carpet guides

GOLD and CHROME POLISHED ALUMINIUM, POLISHED VARNISHED BRASS

### POLISHED VARNISHED BRASS

bar length 2 / 4 LM - pack. 40 / 20 Pcs - 80 LM

Article	Ø mm	€/LM	€/Pc
TGSOL 112 (2 LM)	11	13,51	27,02
TGSOL 114 (4 LM)	11	13,51	54,04
TGSOL 132 (2 LM)	13	15,83	31,66
TGSOL 134 (4 LM)	13	15,83	63,32

### POLISHED ALUMINIUM

bar length 2 / 4 LM - pack. 40 / 20 Pcs - 80 LM

Article	Ø mm	€/LM	€/Pc
TGSBO 122 (2 LM)	12	5,29	10,58
TGSBO 124 (4 LM)	12	5,29	21,16
TGSBC 122 (2 LM)	12	5,29	10,58
TGSBC 124 (4 LM)	12	5,29	21,16

TGSOL 11/13

TGSBO 12

TGSBC 12

## TUBE PLUGS/END CAPS for tube

POLISHED and CHROMED BRASS

**POLISHED and CHROMED BRASS - pack. 60 Pcs**

Article	Ø mm	€/Pc	€/pack.
TETOL 11 (polished)	11	0,54	32,40
TETOC 12 (chromed)	12	1,42	85,20
TETOL 12 (polished)	12	0,64	38,40
TETOL 13 (polished)	13	0,74	44,40

TETOL 11  
TETOL 12  
TETOL 13

TETOC 12

## SUPPORT / EYELET for tube with screw

POLISHED and CHROMED BRASS

**POLISHED and CHROMED BRASS - pack. 20 Pcs**

Article	Ø mm	€/Pc	€/pack.
SOOL 12 (polished)	12	1,80	36,00
SOOC 12 (chromed)	12	3,03	60,60
SOOL 14 (polished)	14	1,90	38,00

SOOL 12  
SOOL 14

SOOC 12

## HINGE SUPPORT for tube

POLISHED BRASS

**POLISHED BRASS - pack. 20 Pcs**

Article	Ø mm	€/Pc	€/pack.
SCOL 11	11	5,96	119,20
SCOL 13	13	6,32	126,40

SCOL 11  
SCOL 13


The indicated prices are without bar code. For bar code add €0,40 x Pc (+ 0,20 x LM) gross and add the letter "C" after the article code. E.g.: SCOL 11C.  
For cutting to required length 1 LM + 5 % x LM gross.

Prices are referred to whole packs. 10% increase for minimum orders of 10 pcs. 20% increase for orders of less than 10 pcs.

# PROWALK ACC

POLISHED STAINLESS STEEL AISI 304/1.4301-V2A  
PUNCHED or SELF ADHESIVE

stair nosing for existing steps

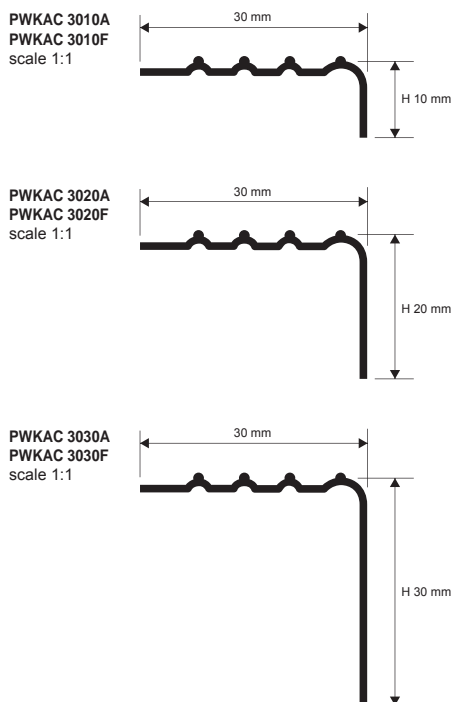

PROWALK is steps protecting steel profile for existing scales. Its superior side level is crimped in order to increase its adhesion. Available in version or with holes either with adhesive. Available sizes: 30 x 10 , 30 x 20 , e 30 x 30 mm. All profiles are protected with protective film. It's ideal for the edges protection and screening as well as of the corner between the rising and the tread which is the point of the greatest strain.



**POLISHED STAINLESS STEEL AISI 304/1.4301-V2A with adhesive thermo packed** - bar length 2,7 LM - pack. 20 Pcs - 54 LM - 10/10mm

Article	L x H mm	€/LM	€/Pc
PWKAC 3010A	30 x 10	14,84	40,07
PWKAC 3020A	30 x 20	16,84	45,47
PWKAC 3030A	30 x 30	18,90	51,03

**POLISHED STAINLESS STEEL AISI 304/1.4301-V2A punched with protective film** - bar length 2,7 LM - pack. 20 Pcs - 54 LM - 10/10mm

Article	L x H mm	€/LM	€/Pc
PWKAC 3010F	30 x 10	13,30	35,91
PWKAC 3020F	30 x 20	15,30	41,31
PWKAC 3030F	30 x 30	17,36	46,87

## COLOURS

(for a precise assessment of colours and finishes, see the relative enclosed sheet)




**ON DEMAND HAND-BRUSHED STAINLESS STEEL**  
(prices and timetable to arrange)

**SUITABLE FOR USE IN CONTACT WITH FOODSTUFFS**


# PROEND

GOLD, SILVER and BRONZE ANOD. ALUMINIUM  
WITH/ WITHOUT ADHESIVE and PUNCHED

stair nosing for existing steps

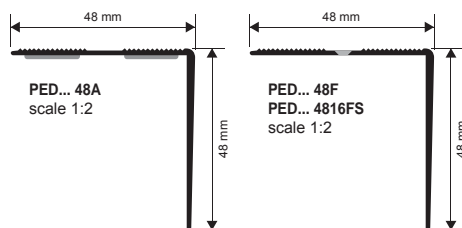

## EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

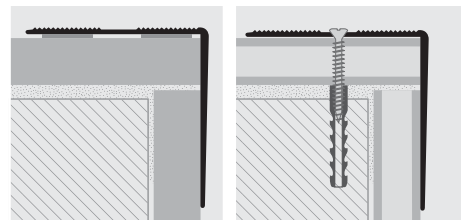

### Adhesive version

1. Choose the suitable profile and cut it to the necessary length.  
2. Degrease, wash and clean the solid surface thoroughly. 3. Remove the protective paper from the adhesive. 4. Lay the profile by applying pressure evenly over the whole surface without using a hammer.

### Punched version

1. Choose the suitable profile and cut it to the necessary length.  
2. Mark the position of the holes using the existing holes in the profile as reference. 3. Insert the screw anchors into the drilled holes. 4. Fix the profile using flathead screws suitable for the relative slots in the profile.



**ANOD. ALUMINIUM with and without adhesive thermo packed**  
bar length 3,30 LM - pack. 10 Pcs - 33 LM

Article	H x L mm	€/LM	€/Pc
PED... 48A (with adhesive)	48 x 48	8,78	28,97
PED... 48 (without adhesive)	48 x 48	7,54	24,88

**ANODISED ALUMINIUM punched thermo packed**  
bar length 3,30 LM - pack. 10 Pcs - 33 LM

Article	H x L mm	€/LM	€/Pc
PED... 48F	48 x 48	7,19	23,73

**ANOD. ALU. punched with screws and screw anchors thermo packed**  
bar length 1,65 LM - pack. 20 Pcs

Article	H x L mm	€/LM	€/Pc
PED... 4816FS	48 x 48		14,68

Available in the finish: AA - AO - AB. The code of the selected colour must be added to the article code.

E.g.: PED... 48A (chosen finish Anod. Gold) PEDAO 48A.



PROWALK is a step nosing profile in polished brass and anodised aluminium for existing steps. The upper part is knurled to increase slip and slide resistance and is applied after laying. Available with holes or without holes. Available in the widths 22 x 22 and 30 x 30 mm. All the profiles are shrink-wrapped. Ideal for protecting and shielding the edges and corner between riser and tread, which are the areas subjected to most stress.

# PROWALK

POLISHED BRASS and ANODISED ALUMINIUM  
ADHESIVE and PUNCHED



**KNURLED POLISHED BRASS with adhesive thermo packed**  
bar length 2,7 LM - pack. 15 Pcs - 40,5 LM

Article	H x L mm	€/LM	€/Pc
PWKOL 22A	22 x 22	18,59	50,19
PWKOL 30A	30 x 30	23,93	64,61

**KNURLED POLISHED BRASS punched thermo packed**  
bar length 2,7 LM - pack. 15 Pcs - 40,5 LM

Article	H x L mm	€/LM	€/Pc
PWKOL 22F	22 x 22	16,53	44,63
PWKOL 30F	30 x 30	21,88	59,08

**KNURLED POLISHED BRASS without holes thermo packed**  
bar length 2,7 LM - pack. 15 Pcs - 40,5 LM

Article	H x L mm	€/LM	€/Pc
PWKOL 22	22 x 22	16,33	44,09
PWKOL 30	30 x 30	21,46	57,94

**KNURLED POLISHED BRASS with adhesive thermo packed**  
bar length 0,90 LM - pack. 20 Pcs

Article	H x L mm	€/LM	€/Pc
PWKOL 229AS	22 x 22		16,43
PWKOL 309AS	30 x 30		23,98

**KNURLED POLI. BRASS punched with screws and screw anchors thermo packed**  
bar length 0,90 LM - pack. 20 Pcs

Article	H x L mm	€/LM	€/Pc
PWKOL 309FS	30 x 30		19,41

**KNURLED ANODISED ALUMINIUM with adhesive thermo packed**  
bar length 2,7 LM - pack. 20 Pcs - 54 LM

Article	H x L mm	€/LM	€/Pc
PWK... 22A	22 x 22	6,41	17,31
PWK... 30A	30 x 30	9,28	25,06

**KNURLED ANODISED ALUMINIUM punched thermo packed**  
bar length 2,7 LM - pack. 20 Pcs - 54 LM

Article	H x L mm	€/LM	€/Pc
PWK... 22F	22 x 22	4,83	13,04
PWK... 30F	30 x 30	7,02	18,95

**KNURLED ANODISED ALUMINIUM without holes thermo packed**  
bar length 2,7 LM - pack. 20 Pcs - 54 LM

Article	H x L mm	€/LM	€/Pc
PWK... 22	22 x 22	4,67	12,61
PWK... 30	30 x 30	6,78	18,31

**KNURLED ANODISED ALUMINIUM with adhesive thermo packed**  
bar length 0,90 LM - pack. 20 Pcs

Article	H x L mm	€/LM	€/Pc
PWK... 229AS	22 x 22		6,97
PWK... 309AS	30 x 30		9,51


**KNURLED ANOD. ALU. punched with screws and screw anchors thermo packed**  
bar length 0,90 LM - pack. 20 Pcs

Article	H x L mm	€/LM	€/Pc
PWK... 229FS	22 x 22		5,69
PWK... 309FS	30 x 30		7,75

Available in the finish: AO - AA - AB (AT, CH and SB available upon request with a minimum quantity order of 540 LM). The code of the selected colour must be added to the article code. E.g.: PWK... 22A (chosen finish Anod. Gold) PWKAO 22A.


## COLOURS

(for a precise assessment of colours and finishes, see the relative enclosed sheet)




Champagne, Sand and titanium Anod. aluminium, UPON REQUEST  
(with a minimum quantity order of 540 LM)


PWK... 22A  
PWK... 229AS  
scale 1:1




PWK... 30A  
PWK... 309AS  
scale 1:1



PWK... 22F  
PWK... 229FS  
scale 1:1




PWK... 30F  
PWK... 309FS  
scale 1:1



stair nosing for existing steps

stair nosing profiles

## EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

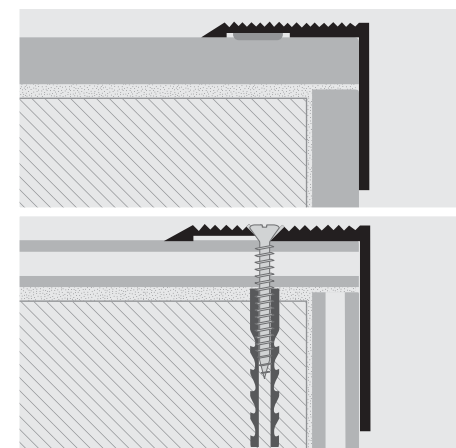

### Adhesive version

1. Choose the suitable profile and cut it to the necessary length. 2. Degrease, wash and clean the solid surface thoroughly. 3. Remove the protective paper from the adhesive. 4. Lay the profile by applying pressure evenly over the whole surface without using a hammer.


### Punched version

1. Choose the suitable profile and cut it to the necessary length. 2. Mark the position of the holes using the existing holes in the profile as reference. 3. Insert the screw anchors into the drilled holes. 4. Fix the profile using flathead screws suitable for the relative slots in the profile.

# PROWALK 2510 & 2520

ALUMINIUM 30 wood finishes and 6 anodised finishes PUNCHED OR SELF ADHESIVE

PROWALK 2510 & 2520 are new stair-nosing profiles for existing stairways. Designed to protect and restore stair steps made of wood, laminate, ceramic, etc. Made with anodised aluminium with silver, gold and bronze finish and available in self-adhesive or perforated versions. Sizes available: 2.7 m lengths and 0.9 m & 1.35 m Self-Pack.

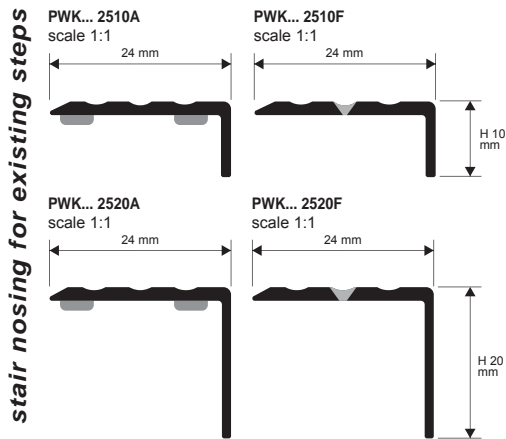



**ANODISED ALUMINIUM with adhesive thermo packed**  
bar length 2,7 LM - pack. 40 Pcs - 108 LM

Article	L x H mm	€/LM	€/Pc
PWK... 2510A	25 x 10	4,78	12,91
PWK... 2520A	25 x 20	5,24	14,15

**ANODISED ALUMINIUM punched thermo packed**  
bar length 2,7 LM - pack. 40 Pcs - 108 LM

Article	L x H mm	€/LM	€/Pc
PWK... 2510F	25 x 10	3,59	9,69
PWK... 2520F	25 x 20	4,12	11,12

## EXAMPLES OF LAYING

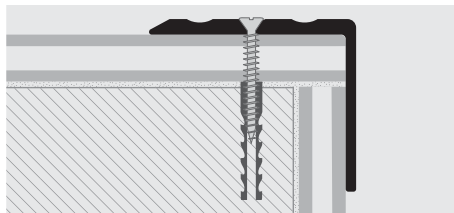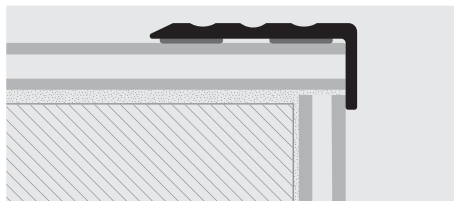

### Adhesive version

1. Choose the suitable profile and cut it to the necessary length.  
2. Degrease, wash and clean the solid surface thoroughly. 3. Remove the protective paper from the adhesive. 4. Lay the profile by applying pressure evenly over the whole surface without using a hammer.

### Punched version

1. Choose the suitable profile and cut it to the necessary length.  
2. Mark the position of the holes using the existing holes in the profile as reference. 3. Insert the screw anchors into the drilled holes. 4. Fix the profile using flathead screws suitable for the relative slots in the profile.

**ANODISED ALUMINIUM with adhesive thermo packed**  
bar length 0,90 LM - pack. 20 Pcs

Article	L x H mm	€/LM	€/Pc
PWK... 25109AS	25 x 10		5,15

**ANODISED ALU. punched with screws and screw anchors thermo packed**  
bar length 0,90 LM - pack. 20 Pcs

Article	L x H mm	€/LM	€/Pc
PWK... 25109FS	25 x 10		4,31

**ANODISED ALU. punched with screws and screw anchors thermo packed**  
bar length 1,35 LM - pack. 20 Pcs

Article	L x H mm	€/LM	€/Pc
PWK... 251013FS	25 x 10		6,26

Available in the finishes: AO - AA - AB (AT, CH and SB available upon request with a minimum quantity order of 540 LM). The code of the selected finish must be added to the article code. E.g.: PWK... 2510A (chosen finish Anod. silver) PWKAA2510A.

**ALUMINIUM 30 WOODEN FINISHES with adhesive thermo packed**  
bar length 2,7 LM - pack. 40 Pcs - 108 LM

Article	L x H mm	€/LM	€/Pc
PWK... 2510A	25 x 10	7,95	21,47
PWK... 2520A	25 x 20	9,55	25,79

## PRODUCTION UPON REQUEST

Available in the finishes: 04W - 05W - 06W - 07W - 08W - 09W - 10W - 11W - 13W - 18W - 21W - 25W - 28W - 29W - 30W - 31W - 32W - 33W - 34W - 35W - 36W - 37W - 38W - 39W - 40W - 41W - 42W - 43W - 44W - 45W with a minimum purchase order of 540 LM. The code of the selected finish must be added to the article code. E.g.: PWK... 2510A (chosen finish Dark beech) PWK04W 2510A.

## COLOURS

(for a precise assessment of colours and finishes, see the relative enclosed sheet)

ANODISED					
AO - Anod. gold aluminium	AA - Anod. silver alu.	AB - Anod. bronze alu.	AT - Anod. titanium aluminium	CH - Anod. Champagne alu.	SB - Anod. Sand aluminium


04W - Dark beech	05W - Light oak (strip)	06W - Dark oak (walnut)	07W - Light cherry (strip)	08W - Dark cherry (board)	09W - Red walnut (merbau-apple-walnut)	10W - Wengé (panga-panga - wengé)	11W - Decapé bleached	13W - Indonesian Teak
18W - Light Zerbano	21W - Oak powder	25W - Bleached Fir	28W - Aspen Oak	29W - White Oak	30W - Grey Oak	31W - Wood	32W - Wood	33W - Wood
34W - Wood	35W - Wood	36W - Wood	37W - Wood	38W - Wood	39W - Wood	40W - Wood	41W - Wood	42W - Wood
43W - Wood	44W - Wood	45W - Wood						

new wood finishes will be available soon

PROEND INS 75 is a step nosing profile in anodised aluminium with interchangeable rubber insert: the upper part is knurled to increase slip and slide resistance and is applied after laying. Available anodised with gold, bronze or silver finish and with adhesive or punched. PROEND INS 75 ensures a perfect finish, covering laying defects and protecting the edge. Easy to lay with the self-adhesive backing ensuring perfect adherence to the step or with screws and screw anchors in the punched version.

## PROEND INS 75

GOLD, SILVER and BRONZE ANOD. ALUMINIUM  
ADHESIVE and PUNCHED

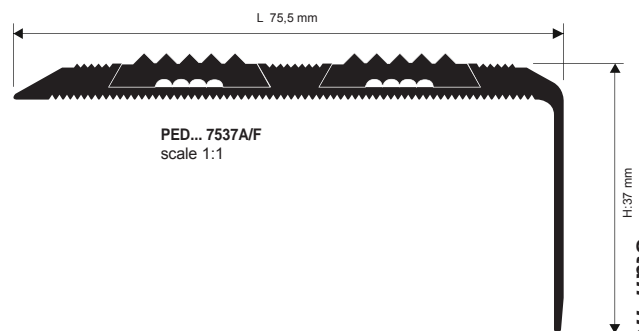

stair nosing for existing steps

stair nosing profiles

**ANODISED ALUMINIUM with adhesive WITH DOUBLE INSERT thermo packed** - bar length 3,30 LM - pack. 10 Pcs - 33 LM

Article	H x L mm	€/LM	€/Pc
PED... 7537A	37 x 75,5	20,67	68,21

**ANODISED ALUMINIUM punched WITH DOUBLE INSERT thermo packed** - bar length 3,30 LM - pack. 10 Pcs - 33 LM

Article	H x L mm	€/LM	€/Pc
PED... 7537F	37 x 75,5	17,67	58,31

Available in the finish: AA - AO - AB. The code of the selected colour must be added to the article code.

E.g.: PED... 7537A (chosen finish Anod. Gold) PEDAO 7537A.

### Adhesive version

1. Choose the suitable profile and cut it to the necessary length. 2. Degrease, wash and clean the solid surface thoroughly. 3. Remove the protective paper from the adhesive. 4. Lay the profile by applying pressure evenly over the whole surface without using a hammer.

### Punched version



1. Choose the suitable profile and cut it to the necessary length. 2. Mark the position of the holes using the existing holes in the profile as reference. 3. Insert the screw anchors into the drilled holes. 4. Fix the profile using flathead screws suitable for the relative slots in the profile.

### COLOURS




(for a precise assessment of colours and finishes, see the relative enclosed sheet)

### EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

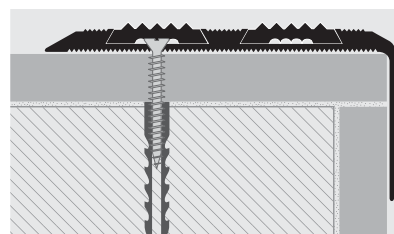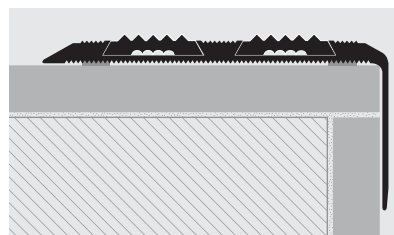

## PROEND INS

GOLD, SILVER and BRONZE ANOD. ALUMINIUM  
ADHESIVE and PUNCHED

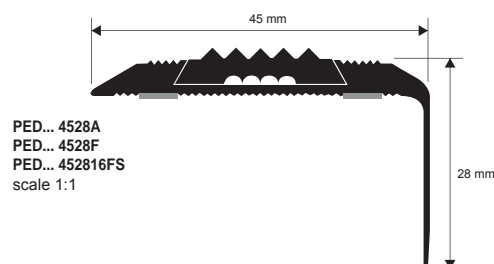

**ANODISED ALU. with adhesive WITH INSERT thermo packed** bar length 3,30 LM - pack. 20 Pcs - 66 LM

Article	H x L mm	€/LM	€/Pc
PED... 4528A	28 x 45	13,10	43,23

**ANOD. ALU. punched WITH INSERT, screws and screw anchors thermo packed** bar length 1,65 LM - pack. 20 Pcs

Article	H x L mm	€/LM	€/Pc
PED... 452816FS	28 x 45	23,79	

Available in the finish: AA - AO - AB. The code of the selected colour must be added to the article code.

E.g.: PED... 4528A (chosen finish Anod. Gold) PEDAO 4528A.

**ANODISED ALUMINIUM punched WITH INSERT thermo packed**

Article	H x L mm	€/LM	€/Pc
PED... 4528F	28 x 45	9,45	31,19



### Adhesive version

1. Choose the suitable profile and cut it to the necessary length. 2. Degrease, wash and clean the solid surface thoroughly. 3. Remove the protective paper from the adhesive. 4. Lay the profile by applying pressure evenly over the whole surface without using a hammer.

### Punched version

1. Choose the suitable profile and cut it to the necessary length. 2. Mark the position of the holes using the existing holes in the profile as reference. 3. Insert the screw anchors into the drilled holes. 4. Fix the profile using flathead screws suitable for the relative slots in the profile.

### EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS



## BLACK INTERCHANGEABLE INSERT

VINYL RESIN / RUBBER

### VINYL RESIN / RUBBER

bar length 3,30 LM - pack. 20 Pcs - 66 LM

Article	€/LM	€/Pc
IIN 12	1,69	5,58




Prices are referred to whole packs. 10% increase for minimum orders of 10 pcs. 20% increase for orders of less than 10 pcs.



# PROEND GRIP 70

SILVER, GOLD and BRONZE ANOD. ALUMINIUM  
+ NON-SLIP INSERT ADHESIVE AND PUNCHED

stair nosing for existing steps

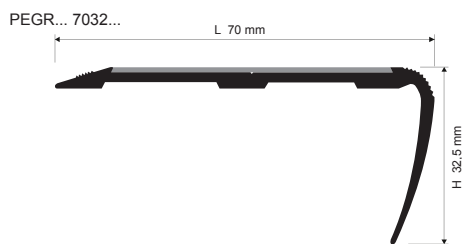

## EXAMPLE AND INSTRUCTIONS FOR LAYING METHODS



### Adhesive version

1. Choose the suitable profile and cut it to the necessary length.  
2. Degrease, wash and clean the solid surface thoroughly. 3. Remove the protective paper from the adhesive. 4. Lay the profile by applying pressure evenly over the whole surface without using a hammer.

### Punched version

1. Choose the suitable profile and cut it to the necessary length.  
2. Mark the position of the holes using the existing holes in the profile as reference. 3. Insert the screw anchors into the drilled holes. 4. Fix the profile using flathead screws suitable for the relative slots in the profile.

PROEND GRIP 70 is a non-slip step nosing profile in anodised aluminium with adhesive non-slip 50mm thick insert in black carborundum to be fitted in the relative groove in the top of the profile upon completion of laying. The profile may be laid with fixing screws hidden afterwards by the adhesive carborundum, or with silicone and/or adhesive to be applied on the bottom of the profile, which is designed to ensure an excellent grip. It is made in anodised aluminium with silver, gold or bronze finish with anodising coat of approx. 15/20 micron.



**SILVER, GOLD and BRONZE ANODISED ALU. with adhesive thermo packed** - bar length 3,4 LM - pack. 20 Pcs - 68 LM

Article	H x L mm	€/LM	€/Pc
PEGR... 7032A	32,5 x 70	14,71	50,01

**SILVER, GOLD and BRONZE ANODISED ALU. punched thermo packed** - bar length 3,4 LM - pack. 20 Pcs - 68 LM

Article	H x L mm	€/LM	€/Pc
PEGR... 7032F	32,5 x 70	12,04	40,94

## COLOURS




(for a precise assessment of colours and finishes, see the relative enclosed sheet)

**The strip of adhesive carborundum (PROGRIP) is not applied. The roll of PGR 50 must be ordered separately (see below).**

# PROEND 5050

ANODISED ALUMINIUM SILVER

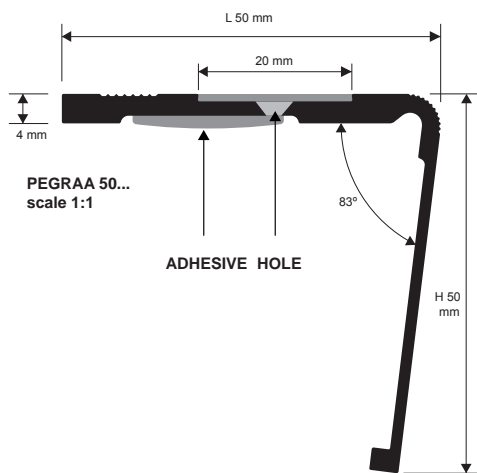

## LAYING INSTRUCTIONS

### • Adhesive version

1. Cut PROEND 5050 to the desired length; 2. Remove all the remains of oil, grease and dirt from the surface where the profile will be laid; 3. When the surface is perfectly dry, remove the protective film and press the profile exerting the appropriate pressure; 4. Apply the non-slip strip in carborundum in the desired colour.

### • Punched version

1. Cut PROEND 5050 to the correct size; 2. Mark on the support the position of the holes present on the profile; 3. Drill holes in the bracket with a 5 mm diameter bit and insert the 5 x 25 mm rawlplugs; 4. Align the profiles over the holes and screw it to support; 5. Apply the non-slip carborundum adhesive insert in the desired color.



**ANODISED ALUMINIUM SILVER punched with adhesive** bar length 3,4 LM - pack. 20 Pcs - 68 LM

Article	H x L mm	€/LM	€/PC
PEGRAA 50F	50 x 50	10,30	35,02
PEGRAA 50A	50 x 50	12,30	41,82

**The adhesive carborundum strip (PROGRIP) is not included with the profile.**



**For PEGRAA 50... order PGR... 20 (Specify the chosen colour).**

## COLOURS



News 2015 Available

## EXAMPLES FOR LAYING METHODS

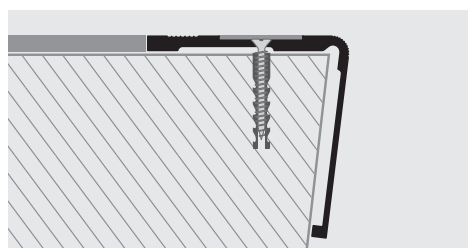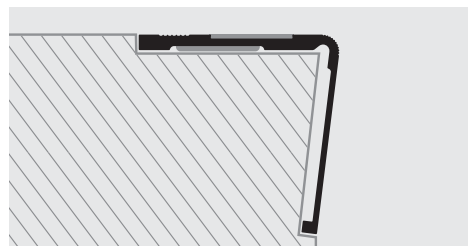

PROEND GRIP is a non-slip step nosing profile in anodised aluminium with adhesive non-slip 20mm thick insert in black carborundum to be fitted in the relative groove in the top of the profile upon completion of laying. The profile may be laid with fixing screws hidden afterwards by the adhesive carborundum, or with silicone and/or adhesive to be applied on the bottom of the profile, which is designed to ensure an excellent grip. It is made in anodised aluminium with silver, gold or bronze finish with anodising coat of approx. 15/20 micron.

# PROEND GRIP

SILVER, GOLD and BRONZE ANOD. ALUMINIUM  
+ NON-SLIP INSERT  
ADHESIVE AND PUNCHED



**SILVER, GOLD and BRONZE ANODISED ALU. with adhesive thermo packed**

bar length 3,4 LM - pack. 20 Pcs - 68 LM

Article	H x L mm	€/LM	€/Pc
PEGR... 5230A	52 x 30	12,41	42,19

**SILVER, GOLD and BRONZE ANODISED ALU. with adhesive thermo packed**

bar length 1,66 LM - pack. 20 Pcs



Article	H x L mm	€/LM	€/Pc
PEGR... 523016AS	52 x 30		24,55

Available in the finish: AA - AO - AB. The code of the selected colour must be added to the article code. E.g.: PEGR... 523016AS (chosen finish Anod. silver) PEGRAA 523016AS.

**The strip of adhesive carborundum (PROGRIP) is not applied. The roll of PGR 20 must be ordered separately (see below).**

## COLOURS

(for a precise assessment of colours and finishes, see the relative enclosed sheet)



**SILVER, GOLD and BRONZE ANODISED ALUMINIUM punched thermo packed**

bar length 3,4 LM - pack. 20 Pcs - 68 LM

Article	H x L mm	€/LM	€/Pc
PEGR... 5230F	52 x 30	10,42	35,43


**SILVER, GOLD and BRONZE ANOD. ALU. punched with screws and screw anchors thermo packed**

bar length 1,66 LM - pack. 20 Pcs




Article	H x L mm	€/LM	€/Pc
PEGR... 523016FS	52 x 30		22,13

PEGR... 5230A/F  
scale 1:1

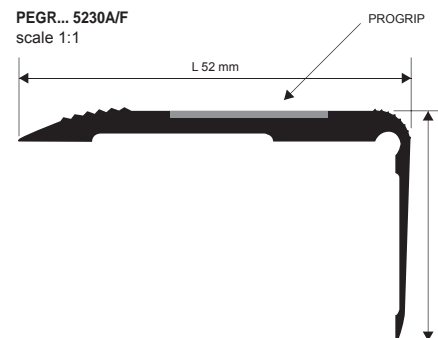

stair nosing for existing steps

## EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

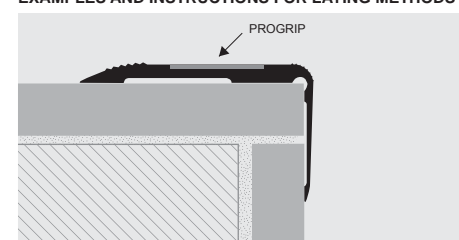

1. Choose the suitable profile for covering the edge of the step.
2. Clean the surface on which the profile is to be laid, ensuring that it is grease-free and dry. Do not apply the strips at temperatures below 15°.
3. Remove the protective paper from the adhesive and lay correctly by applying pressure evenly over the whole profile without using a hammer.

If the punched PROEND GRIP has been chosen, screw the profile to the step and apply the adhesive carborundum to hide the screws.


PROGRIP is a self-adhesive product in carborundum consisting of a plastic film plus abrasive granules with high resistance to wear. It is normally used to guarantee safety on steps in public and private environments, as required by accident-prevention laws. Available in various colours and widths to meet all technical and aesthetic requirements. It is advisable to apply 2 strips on each step, rounding off the ends.



**ADHESIVE CARBORUNDUM NON-SLIP STRIP for STEPS**  
rolls length 18,2 LM

Article	Width mm	€/LM	€/Roll
PGRN 20 (black colour)	20	1,54	28,03
PGRB 20 (white colour)	20	2,73	49,69
PGRT 20 (transparent)	20	1,54	28,03
PGRG 20 (grey colour)	20	3,07	55,87
PGRY 20 (yellow colour)	20	3,07	55,87
PGRM 20 (brown colour)	20	1,78	32,40
PGRN 25 (black colour)	25	2,05	37,31
PGRB 25 (white colour)	25	3,08	56,06
PGRT 25 (transparent)	25	2,05	37,31
PGRG 25 (grey colour)	25	3,49	63,52
PGRY 25 (yellow colour)	25	3,39	61,70
PGRM 25 (brown colour)	25	2,36	42,95
PGRN 50 (black colour)	50	4,21	76,62
PGRB 50 (white colour)	50	6,26	113,93
PGRT 50 (transparent)	50	4,21	76,62
PGRG 50 (grey colour)	50	6,93	126,13
PGRY 50 (yellow colour)	50	6,88	125,22
PGRM 50 (brown colour)	50	4,67	84,99

## COLOURS

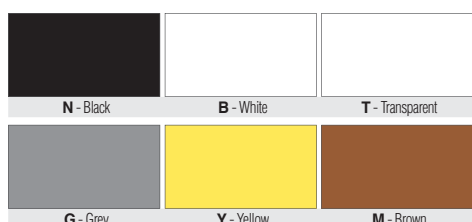


(for a precise assessment of colours and finishes, see the relative enclosed sheet)

## LAYING INSTRUCTIONS

1. Thoroughly clean and degrease the surface of application.
2. Round the ends of the strips.
3. Remove the protective paper from the adhesive and lay the PROGRIP using a roller.
4. Do not apply the strips at temperatures below 15°, otherwise heat the strips and the step.
5. When necessary clean away impurities with a brush and preserve the PROGRIP.
6. When laying on tiles, cut and round the corners of the strips on the inner part of the tile.
7. Carefully seal the outer edges of the strips to prevent water infiltration.


# PROGRIP

ADHESIVE CARBORUNDUM - 6 COLOURS

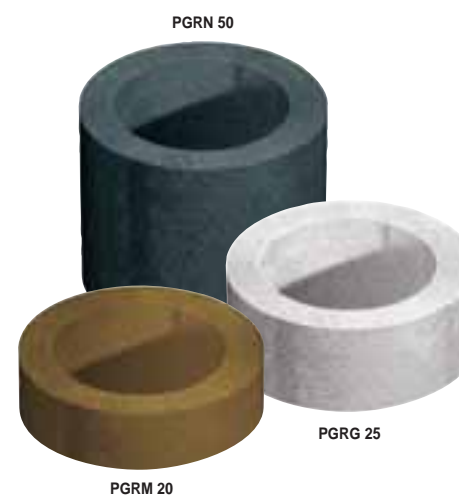

non-slip strip for steps

## EXAMPLES OF LAYING

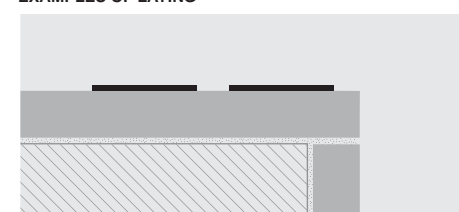



PROFILES & SYSTEMS