

EKSPLUATĀCIJAS ĪPAŠĪBU DEKLARĀCIJA No: CPR-NO1/0015

- Unikāls izstrādājuma tipa identifikācijas numurs: **MAPECOAT UNIVERSAL**
- Tipa, partijas vai sērijas numurs vai kāds cits būvizstrādājuma identifikācijas elements, kā noteikts 11. panta 4. punktā: **Sintētisko sveķu grīdu izveides materiāls - (pārklājums) (SR-B2.0-AR0.5-IR20)**
- Būvizstrādājuma paredzētais izmantojums vai izmantojumi saskaņā ar piemērojamo saskaņoto tehnisko specifikāciju, kā paredzējis ražotājs: **Grīdu izveides materiāls iekšdarbiem**
- Ražotāja nosaukums, reģistrētais komercnosaukums vai reģistrētā preču zīme un kontaktadrese, kā noteikts 11. panta 5. punktā: **MAPEI AS – Vallsetvegen, 6 – 2120 Sagstua (Norway) www.mapei.no**
- Vajadzības gadījumā tā pilnvarotā pārstāvja vārds un kontaktadrese, kura pilnvaras attiecas uz 12. panta 2. punktā nosauktajiem uzdevumiem: **Nav piemērojams**
- Ekspluatācijas īpašību noturības novērtējuma un pārbaudes sistēma vai sistēmas, kā noteikts V pielikumā:
Sistēma 4
Sistēma 3, uguns noturības noteikšanai
- Gadījumā, ja ekspluatācijas īpašību deklarācija attiecas uz būvizstrādājumu, kuram ir saskaņotais standarts: **Pilnvarotā testēšanas laboratorijā MPA Dresden GmbH N. 0767 veikta ugunsdrošības klases noteikšana izmantojot ražotāja iesniegtos paraugus, 3. sistēmas ietvaros un izsniegts ziņojums nr. 2012-B-0952/01.**
- Gadījumā, ja ekspluatācijas īpašību deklarācija attiecas uz būvizstrādājumu, kuram ir izdots Eiropas tehniskais novērtējums: **Nav piemērojams**
- Deklarētās ekspluatācijas īpašības

Būtiskie raksturlielumi	Ekspluatācijas īpašības	Saskaņota tehniskā specifikācija
Uguns noturība: Kodīgu vielu izdalīšana: Ūdens caurlaidība: Berzes noturība: Adhēzija: Trieciennoturība: Skaņas izolācija: Skaņas absorbētspēja: Termālā noturība: Ķīmiskā noturība:	Bn-s1 SR NPD AR0.5 B2.0 IR20 NPD NPD NPD NPD	EN 13813:2002

- Pielikuma 1. un 2. punktā norādītā izstrādājuma ekspluatācijas īpašības atbilst 9. punktā norādītajām deklarētajām ekspluatācijas īpašībām.

Par šo izdoto ekspluatācijas īpašību deklarāciju ir atbildīgs vienīgi 4. punktā norādītais ražotājs.

Parakstīts ražotāja vārdā:

Trond Hagerud – Managing director

(vārds, uzvārds, amats)

Sagstua, 01/07/2013

(izdošanas vieta un datums)

.....

(paraksts)

CE MARKING according to CPR 305/2011 and EN 13813:2002

 0767	 MAPEI Vallsetvegen 6, 2120 Sagstua (Norway) www.mapei.no																				
13 CPR-NO1/0015 EN 13813:2002 MAPECOAT UNIVERSAL Sintētisko sveķu pamatņu izveides materiāls (pārklājums iekšdarbiem) <table><tr><td>Uguns noturība:</td><td>B_{fl}-s1</td></tr><tr><td>Kodīgu vielu izdalīšana:</td><td>SR</td></tr><tr><td>Ūdens caurlaidība:</td><td>NPD</td></tr><tr><td>Berzes noturība:</td><td>AR0.5</td></tr><tr><td>Adhēzija:</td><td>B2.0</td></tr><tr><td>Trieciennoturība:</td><td>IR20</td></tr><tr><td>Skaņas izolācija:</td><td>NPD</td></tr><tr><td>Skaņas absorbētspēja:</td><td>NPD</td></tr><tr><td>Termālā noturība:</td><td>NPD</td></tr><tr><td>Ķīmiskā noturība:</td><td>NPD</td></tr></table>		Uguns noturība:	B _{fl} -s1	Kodīgu vielu izdalīšana:	SR	Ūdens caurlaidība:	NPD	Berzes noturība:	AR0.5	Adhēzija:	B2.0	Trieciennoturība:	IR20	Skaņas izolācija:	NPD	Skaņas absorbētspēja:	NPD	Termālā noturība:	NPD	Ķīmiskā noturība:	NPD
Uguns noturība:	B _{fl} -s1																				
Kodīgu vielu izdalīšana:	SR																				
Ūdens caurlaidība:	NPD																				
Berzes noturība:	AR0.5																				
Adhēzija:	B2.0																				
Trieciennoturība:	IR20																				
Skaņas izolācija:	NPD																				
Skaņas absorbētspēja:	NPD																				
Termālā noturība:	NPD																				
Ķīmiskā noturība:	NPD																				

Declaration of performance: No. CPR-NO1/0015

1. Unique identification code of the product-type: **MAPECOAT UNIVERSAL**
2. Type, batch or serial number or any other element allowing identification of the construction product as required under Article 11(4) of the CPR:

SYNTHETIC RESIN SCREED MATERIAL – COATING (SR-B2.0-AR0.5-IR20)

3. Intended use or uses of the construction product, in accordance with the applicable harmonised technical specification, as foreseen by the manufacturer:

for internal use in floor construction

4. Name, registered trade name or registered trade mark and contact address of the manufacturer as required under Article 11(5): **MAPEI AS – Vallsetvegen 6 – 2120 Sagstua (Norway) www.mapei.no**
5. Where applicable, name and contact address of the authorised representative whose mandate covers the tasks specified in Article 12(2): **Not applicable**
6. System or systems of assessment and verification of constancy of performance of the construction product as set out in Annex V:
System 4
System 3 for reaction to fire
7. In case of the declaration of performance concerning a construction product covered by a harmonised standard:
The notified testing laboratory MPA Dresden GmbH N. 0767, performed the determination of the class of reaction to fire on samples taken by the manufacturer, under system 3, and issued the report N. 2012- B - 3319/01.
8. In the case the declaration of performance concerning a construction product for which a European Technical assessment has been issued: **Not applicable**
9. Declared performance

Essential characteristics	Performance	Harmonised technical specification
Reaction to fire:	Class B_{fi}-s1	EN 13813:2002
Release of corrosive substances:	SR	
Water permeability:	NPD	
Wear resistance:	AR0.5	
Bond strength:	B2.0	
Impact resistance:	IR20	
Sound insulation:	NPD	
Sound absorption:	NPD	
Thermal resistance:	NPD	
Chemical resistance:	NPD	


10. The performance of the product identified in points 1 and 2 is in conformity with the declared performance in point 9.

This declaration of performance is issued under the sole responsibility of the manufacturer identified in point 4.

Signed for and on behalf of the manufacturer by: **Trond Hagerud – Managing Director**

Sagstua, 01/07/2013

(place and date of issue)

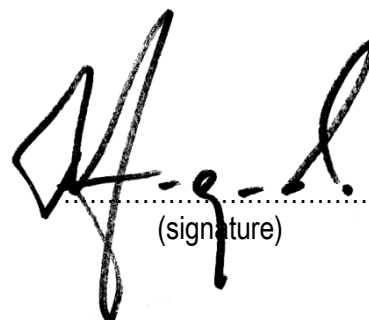

(signature)

CE MARKING according to CPR 305/2011 and EN 13813:2002

 0767	 Vallsetvegen 6, 2120 Sagstua (Norway) www.mapei.no																				
13 CPR-NO1/0015 EN 13813:2002 MAPECOAT UNIVERSAL Synthetic resin screed material (coating) for internal use <table><tr><td>Reaction to fire:</td><td>B_{fl}-s1</td></tr><tr><td>Release of corrosive substances:</td><td>SR</td></tr><tr><td>Water permeability:</td><td>NPD</td></tr><tr><td>Wear resistance:</td><td>AR0.5</td></tr><tr><td>Bond strength:</td><td>B2.0</td></tr><tr><td>Impact resistance:</td><td>IR20</td></tr><tr><td>Sound insulation:</td><td>NPD</td></tr><tr><td>Sound absorption:</td><td>NPD</td></tr><tr><td>Thermal resistance:</td><td>NPD</td></tr><tr><td>Chemical resistance:</td><td>NPD</td></tr></table>		Reaction to fire:	B _{fl} -s1	Release of corrosive substances:	SR	Water permeability:	NPD	Wear resistance:	AR0.5	Bond strength:	B2.0	Impact resistance:	IR20	Sound insulation:	NPD	Sound absorption:	NPD	Thermal resistance:	NPD	Chemical resistance:	NPD
Reaction to fire:	B _{fl} -s1																				
Release of corrosive substances:	SR																				
Water permeability:	NPD																				
Wear resistance:	AR0.5																				
Bond strength:	B2.0																				
Impact resistance:	IR20																				
Sound insulation:	NPD																				
Sound absorption:	NPD																				
Thermal resistance:	NPD																				
Chemical resistance:	NPD																				